

HOOKLIFT

ARTICULATED

TELESCOPIC

TELESCOPIC ARTICULATED



bob unilift

lift your life

www.bobunilift.com

bob unilift

4

bob

Chiabotti
Rea

SP 661

SP 159



Da 45 anni produciamo attrezzature per il trasporto di materiali sviluppando un know how globale in grado di renderci una delle aziende di riferimento a livello internazionale.



For 45 years we have been producing equipment for the transport of materials developing a global know-how able to make us one of the reference companies at international level.




Depuis 45 ans, nous produisons des équipements pour le transport de matériaux développant un savoir-faire mondial capable de faire de nous l'une des sociétés de référence au niveau international



Seit 45 Jahren produzieren wir Anlagen für den Transport von Materialien und entwickeln ein globales Know-how, das uns zu einem der Referenzunternehmen auf internationaler Ebene machen kann



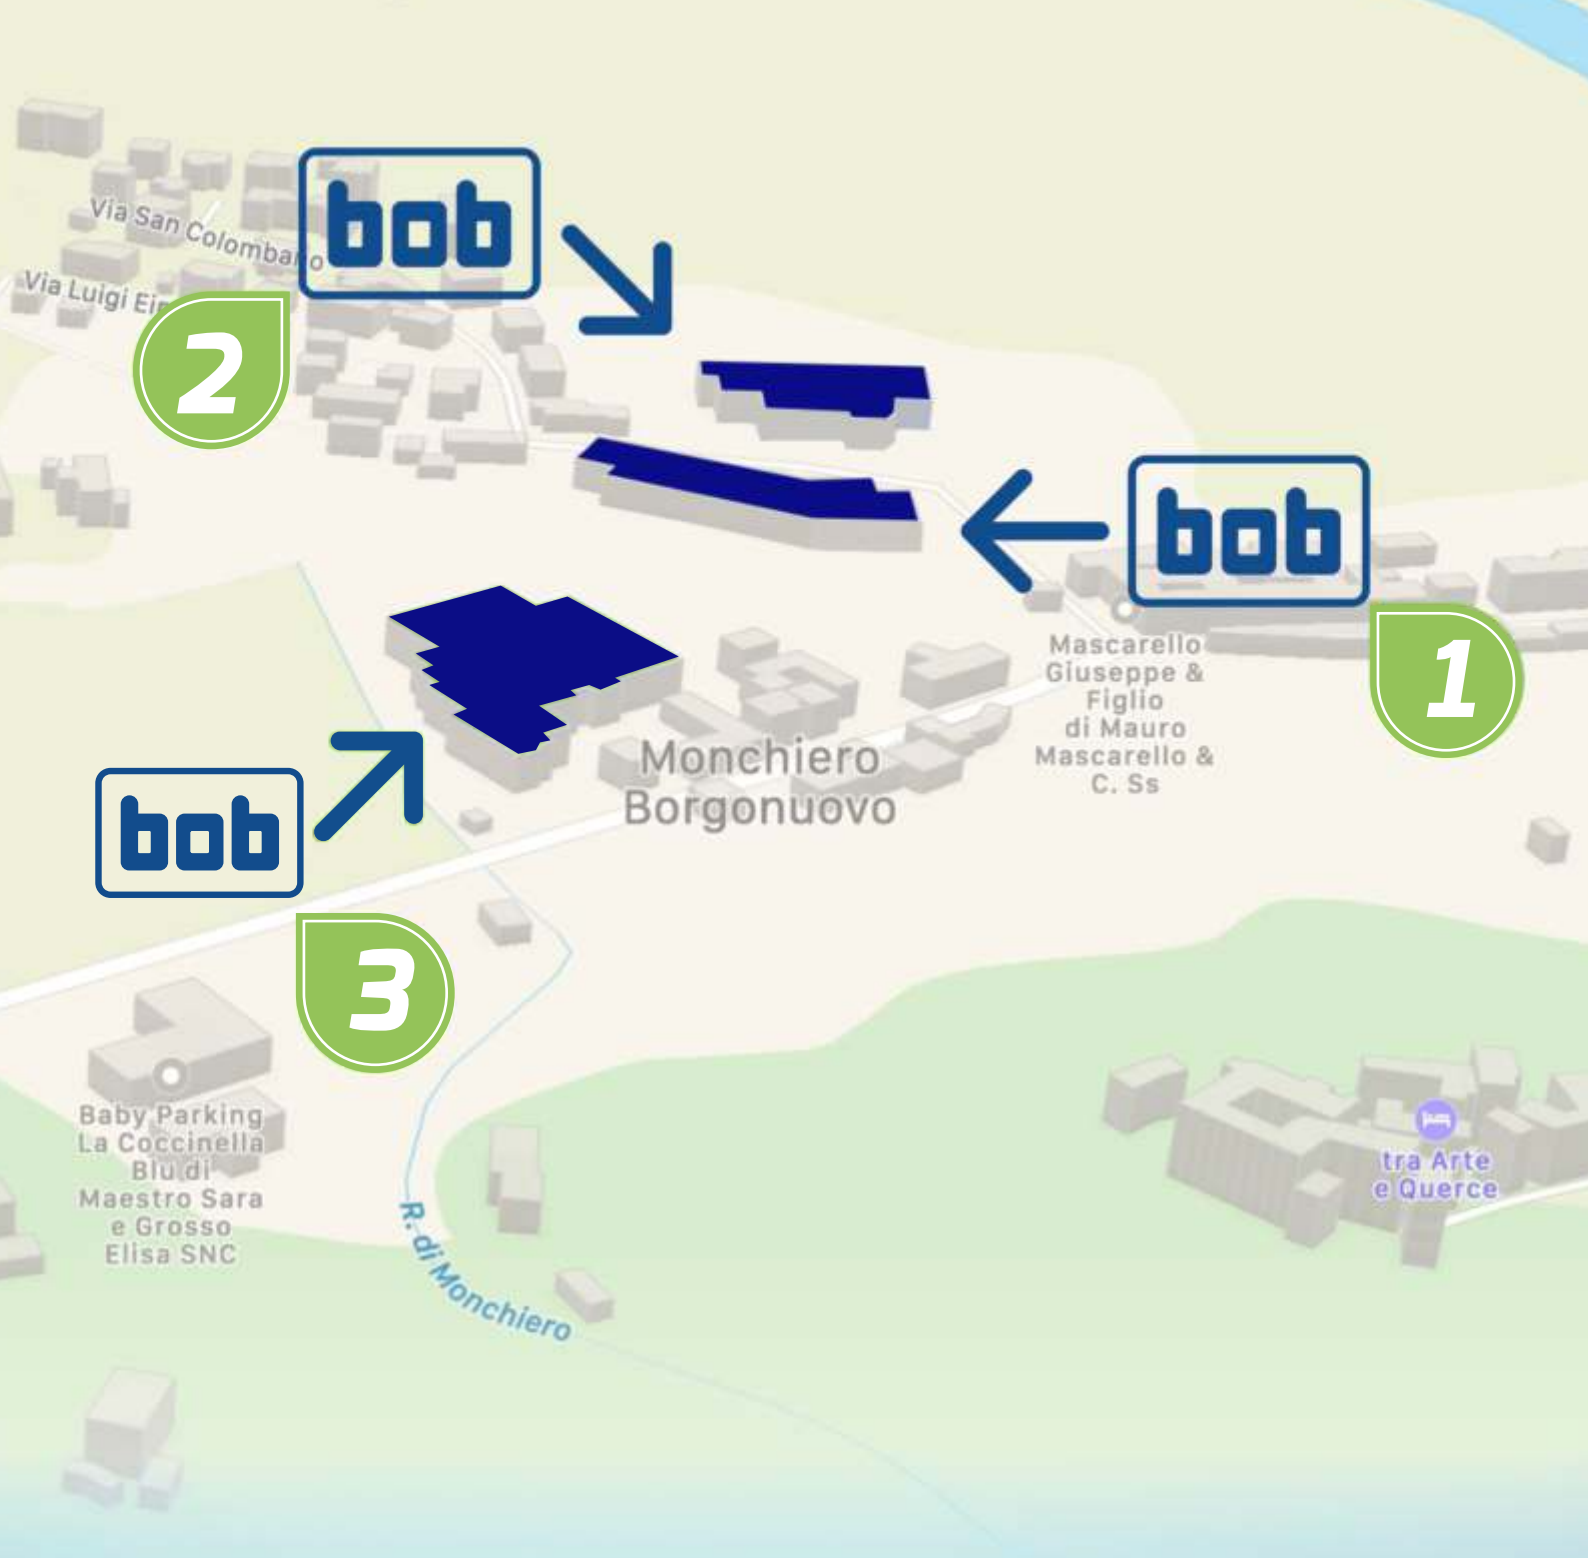

BOBEASY
CAB CONTROL




ARTICULATED ARM



ELECTRO HYDRAULIC
FLOW CONTROL WITH
EMERGENCY LEVERS




HYDRAULIC
EXTERNAL
LOCKING

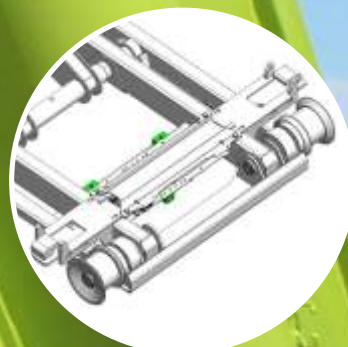


UNDERFRAME PIERCED
LONGITUDINAL
MEMBERS



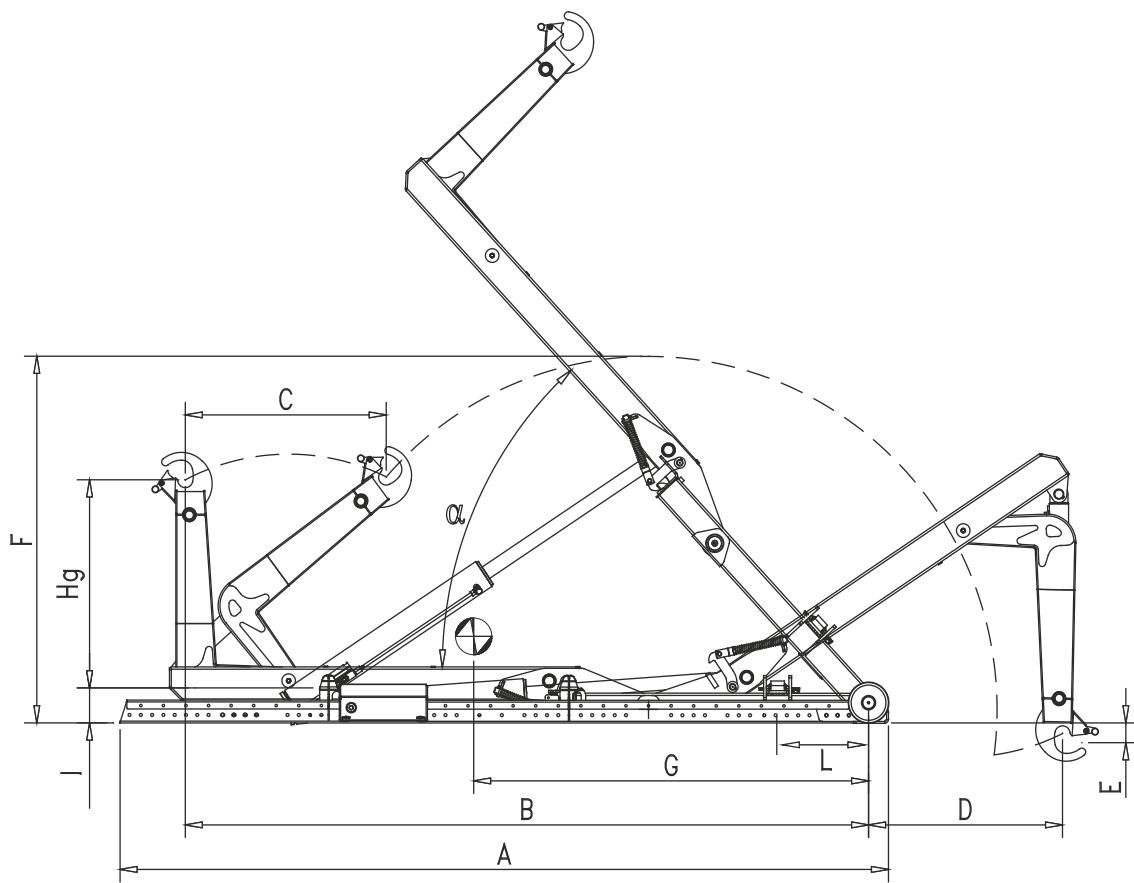

MODEL	A 7.000 XC	A 7.000 C	A 7.000 N	A 7.000 L
Hg	35.63" (905 mm)			
A	104.72" (2.660 mm)	116.53" (2.960 mm)	124.4" (3.160 mm)	132.28" (3.360 mm)
B	95.47" (2.425 mm)	107.28" (2.725 mm)	119.09" (3.025 mm)	125.98" (3.200 mm)
C	34.64" (880 mm)			31.49" (800 mm)
D	25.59" (650 mm)	23.62" (600 mm)		21.65" (550 mm)
E	7.87" (200 mm)	3.93" (100 mm)	1.96" (50 mm)	3.93" (100 mm)
F	54.72" (1.390 mm)	59.05" (1.500 mm)	62.99" (1.600 mm)	66.92" (1.700 mm)
Weight*	990 lb (450 Kg)	1.020 lb (465 Kg)	1.055 lb (480 Kg)	1.145 lb (520 Kg)
α	57°	51°	47°	45°
Container min. max.	8' – 10' (2.440 – 3.050 mm)	9' – 11' (2.740 – 3.350 mm)	10' – 12' (3.050 – 3.650 mm)	11' – 13' (3.350 – 3.950 mm)
LIFTING CAPACITY	7.000 lb (3.180 Kg)			
TIPPING CAPACITY	7.000 lb (3.180 Kg)			

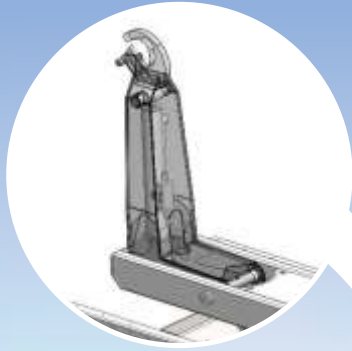


ARTICULATED ARM

BOBEASY
CAB CONTROL




HYDRAULIC
EXTERNAL LOCKING



UNDERFRAME PIERCED
LONGITUDINAL
MEMBERS



ELECTRO HYDRAULIC
FLOW CONTROL WITH
EMERGENCY LEVERS

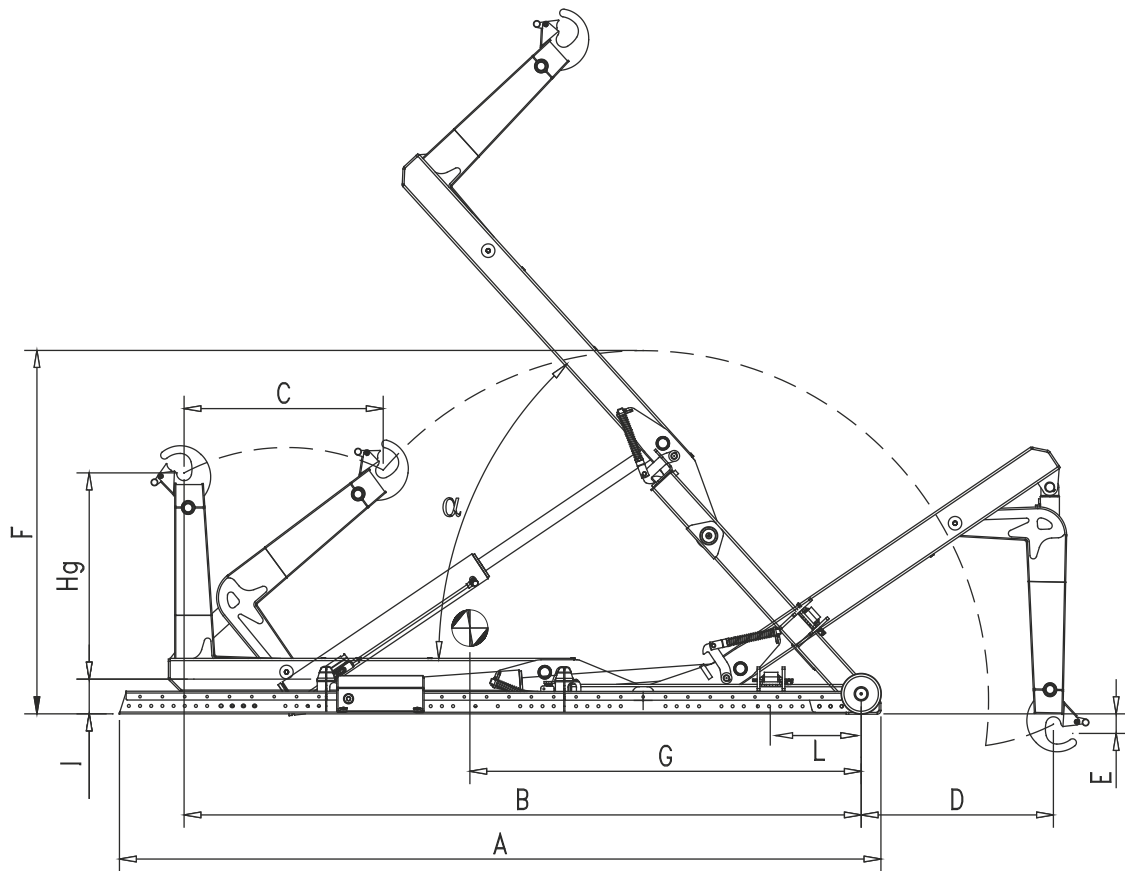

MODEL	A 9.000 XC	A 9.000 XC	A 9.000 N	A 9.000 L
Hg	35.63" (905 mm)			
A	104,72" (2.660 mm)	116.53" (2.960 mm)	124.4" (3.160 mm)	132.28" (3.360 mm)
B	95,47" (2.425 mm)	107,28" (2.725 mm)	119,09" (3.025 mm)	125,98" (3.200 mm)
C	34,64" (880 mm)			31,49" (800 mm)
D	25,59" (650 mm)	23,62" (600 mm)		21,65" (550 mm)
E	7,87" (200 mm)	3,93" (100 mm)	1,96" (50 mm)	3,93" (100 mm)
F	54,72" (1.390 mm)	59,05" (1.500 mm)	62,99" (1.600 mm)	66,92" (1.700 mm)
Weight*	1.012 lb (460 Kg)	1.045 lb (475 Kg)	1.078 lb (490 Kg)	1.116 lb (530 Kg)
α	57°	51°	47°	45°
Container min. max.	8' – 10' (2.440 – 3.050 mm)	9' – 11' (2.740 – 3.350 mm)	10' – 12' (3.050 – 3.650 mm)	11' – 13' (3.350 – 3.950 mm)
LIFTING CAPACITY	9.000 lb (4.090 Kg)			
TIPPING CAPACITY	9.000 lb (4.090 Kg)			


FRONT CONTAINER
SUPPORT SRMS




BOBEASY
CAB CONTROL



EXTERNA
HYDRAULIC LOCKING



UNDERFRAME PIERCED
LONGITUDINAL
MEMBERS

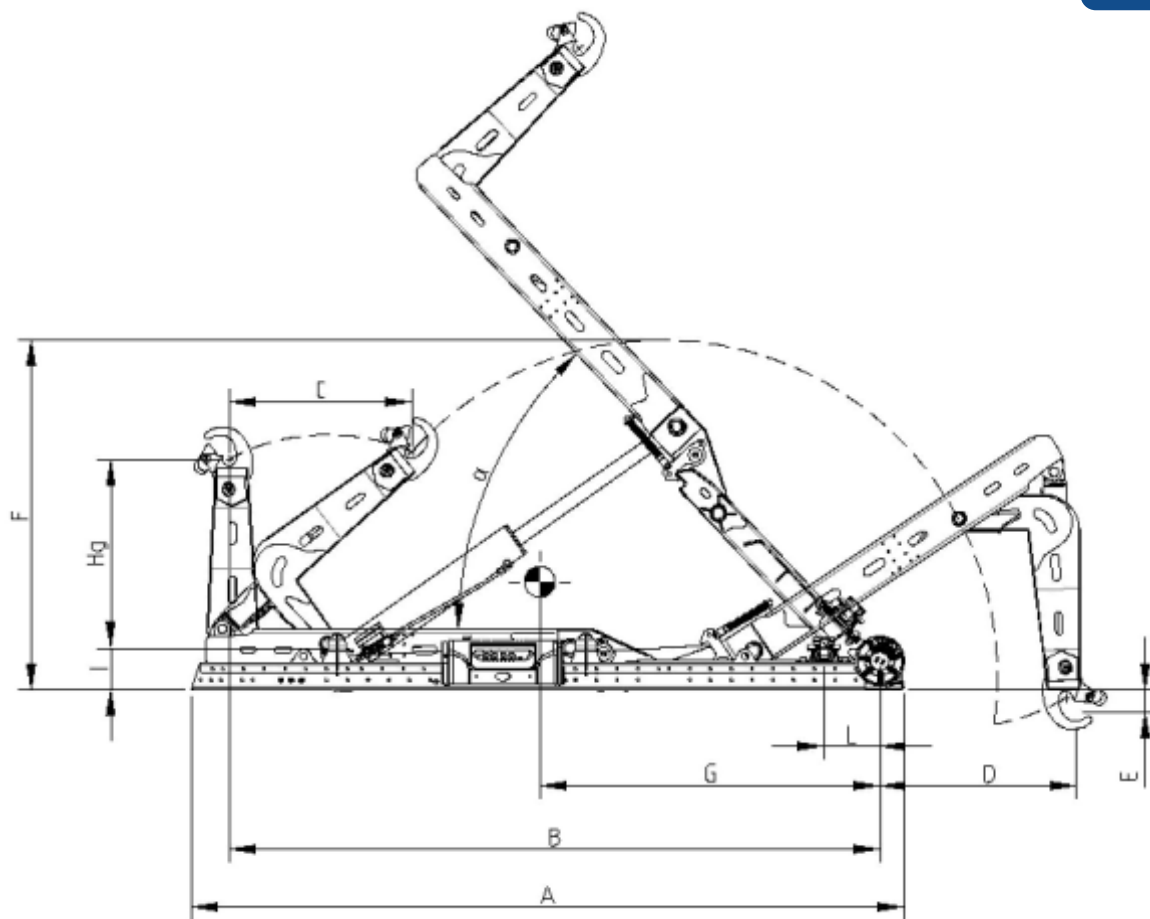


MODEL	A 14.000 C	A 14.000 N	A 14.000 L	A 14.000 XL	A 14.000 XXL
Hg	35,63" (905 mm)				
A	124,6" (3.165 mm)	132,48" (3.365 mm)	140,35" (3.565 mm)	148,22" (3.765 mm)	156,1" (3.965 mm)
B	116,14" (2.950 mm)	124,01" (3.150 mm)	131,88" (3.350 mm)	139,76" (3.550 mm)	147,63" (3.750 mm)
C	33,66" (885 mm)				
D	36,81" (935 mm)	28,93" (735 mm)	21,06" (535 mm)	30,9" (785 mm)	23,03" (585 mm)
E	3,93" (100 mm)			5,9" (150 mm)	
F	65,15" (1.655 mm)			70,86" (1.800 mm)	
Weight*	1.958 lb (890 Kg)	2.024 lb (920 Kg)	2.090 lb (950 Kg)	2.354 lb (1.070 Kg)	2.420 lb (1.100 Kg)
α	52°	46°	42°	52°	47°
Container min. max.	10' – 12' (3.050 – 3.650 mm)	11' – 13' (3.350 – 3.950 mm)	12' – 13' (3.650 – 3.950 mm)	12' – 14' (3.650 – 4.250 mm)	13' – 15' (3.950 – 4.550 mm)
LIFTING CAPACITY	14.000 lb (6.360 Kg)				
TIPPING CAPACITY	14.000 lb (6.360 Kg)				

FRONT CONTAINER
SUPPORT ARMS



BOBEASY
CAB CONTROL




EXTERNAL
HYDRAULIC LOCKING




UNDERFRAME PIERCED
LONGITUDINAL
MEMBERS



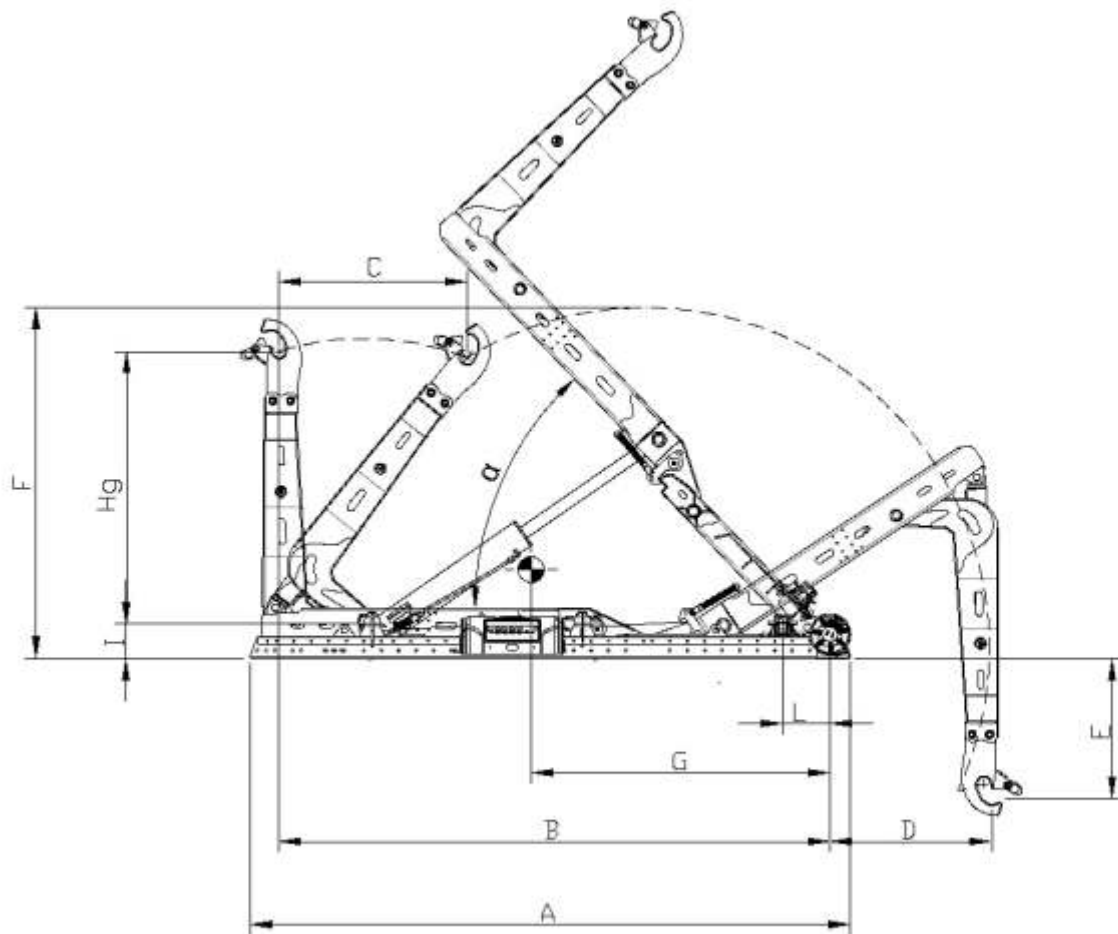


MODEL	A 18.000 C	A 18.000 N	A 18.000 L	A 18.000 XL	A 18.000 XXL
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	124,6" (3.165 mm)	132,48" (3.365 mm)	140,35" (3.565 mm)	148,22" (3.765 mm)	156,1" (3.965 mm)
B	116,14" (2.950 mm)	124,01" (3.150 mm)	131,88" (3.350 mm)	139,76" (3.550 mm)	147,63" (3.750 mm)
C	39,37" (1.000 mm)				
D	38,38" (975 mm)	30,51" (775 mm)	22,63" (575 mm)	32,87" (835 mm)	25" (635 mm)
E	17,71" (450 mm)			25,59" (650 mm)	
F	77,95" (1.980 mm)			86,22" (2.190 mm)	
Weight*	2.024 lb (920 Kg)	2.090 lb (950 Kg)	2.150 lb (980 Kg)	2.420 lb (1.100 Kg)	2.480 lb (1.130 Kg)
α	52°	46°	42°	52°	47°
Container min. max.	10' – 12' (3.050 – 3.650 mm)	11' – 13' (3.350 – 3950 mm)	12' – 13' (3.650 – 3.950 mm)	12' – 14' (3.650 – 4.250 mm)	13' – 15' (3.950 – 4.550 mm)
LIFTING CAPACITY	18.000 lb (8.180 Kg)				
TIPPING CAPACITY	18.000 lb (8.180 Kg)				


ELECTRO HYDRAULIC
FLOW CONTROL WITH
EMERGENCY LEVERS

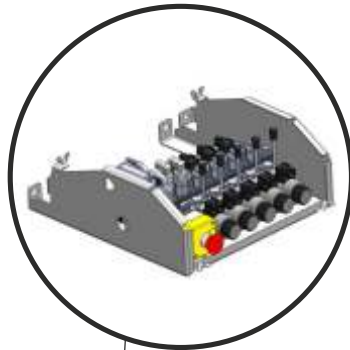


BOBEASY
CAB CONTROL

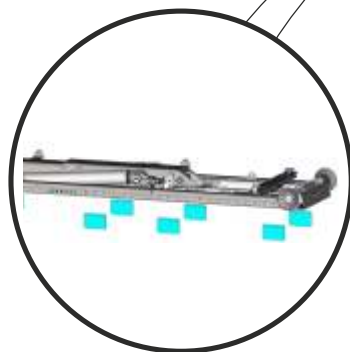


UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

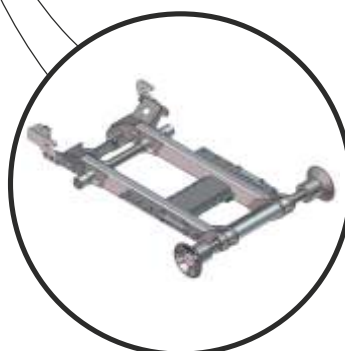

MECHANICAL
LOCKING PINS

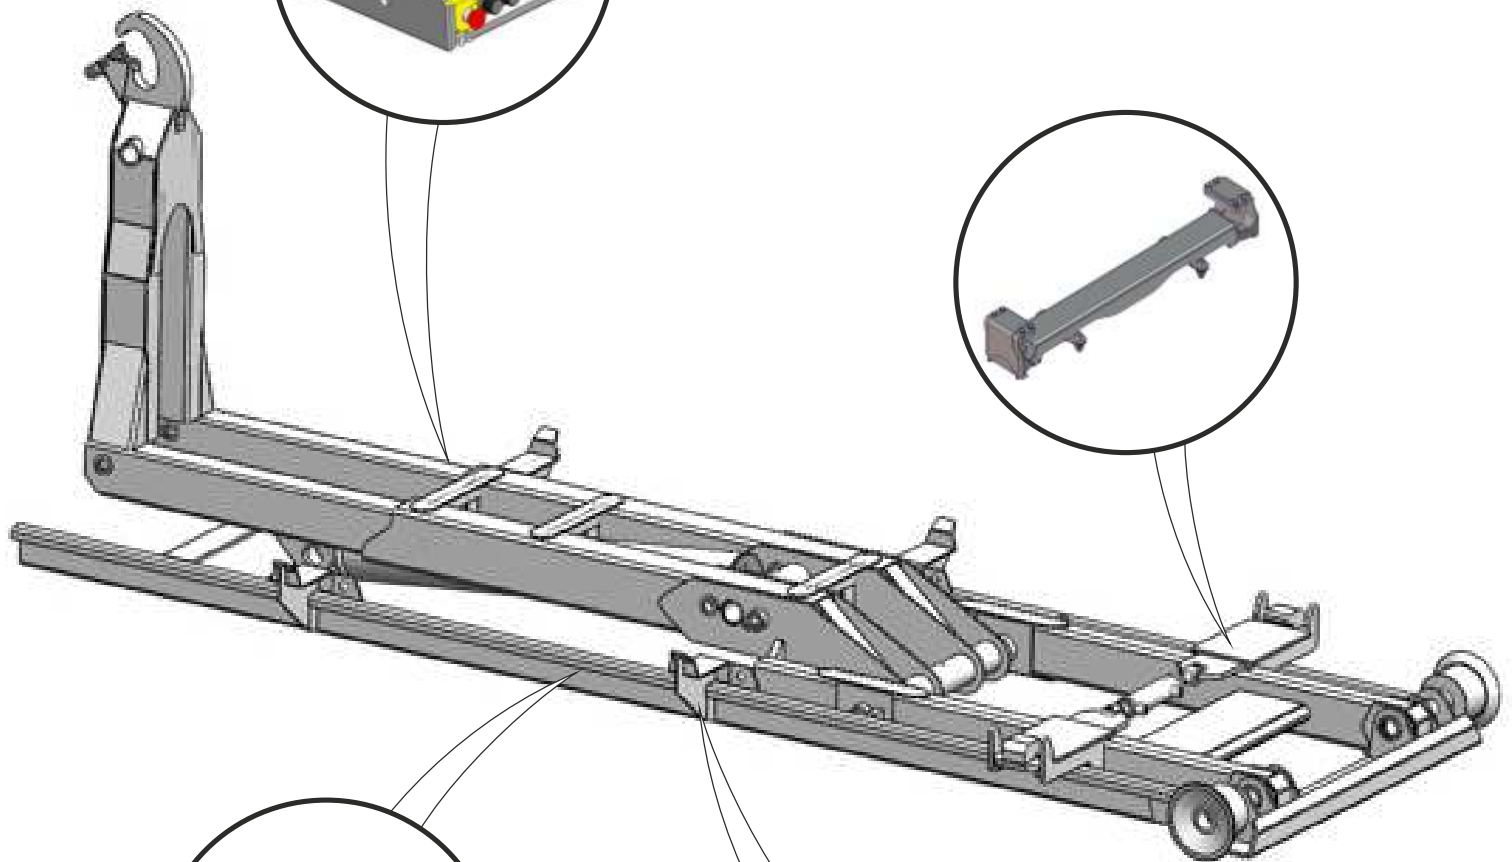

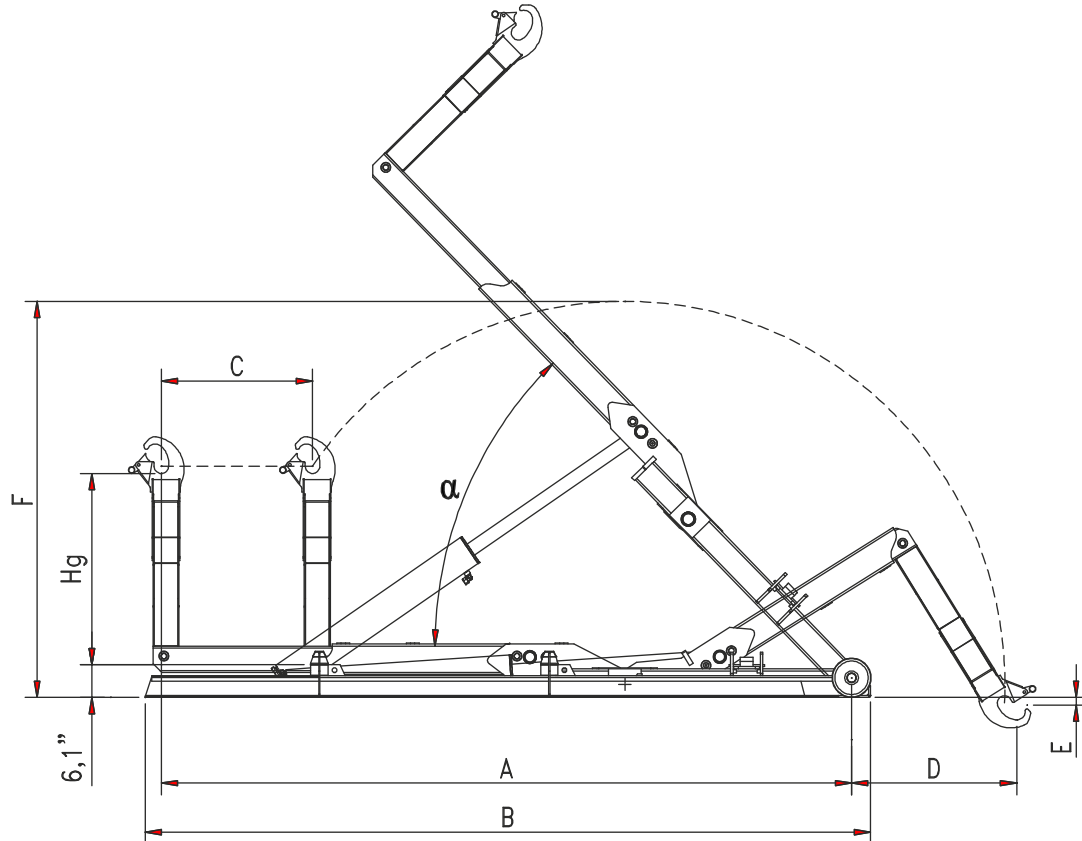

MODEL	T 7.000 C	T 7.000 N	T 7.000 L
Hg	35,63" (905 mm)		
A	113,77" (2.890 mm)	125,59" (3.190 mm)	132,28" (3.360 mm)
B	107,28" (2.725 mm)	119,09" (3.025 mm)	125,98" (3.200 mm)
C	17,71" (450 mm)	23,62" (600 mm)	27,55" (700 mm)
D	38,97" (990 mm)	33,07" (840 mm)	29,92" (760 mm)
E	1,37" (35 mm)		
F	71,65" (1.820 mm)		
Weight*	1.165 lb (530 Kg)	1.210 lb (550 Kg)	1.230 lb (560 Kg)
α	51°	47°	46°
Container min. max.	9' – 11' (2.740 – 3.350 mm)	10' – 12' (3.050 – 3.650 mm)	11' – 13' (3.350 – 3.950 mm)
LIFTING CAPACITY	7.000 lb (3.180 Kg)		
TIPPING CAPACITY	7.000 lb (3.180 Kg)		



BOBEASY
CAB CONTROL


EXTERNAL MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




MECHANICAL
LOCKING PINS

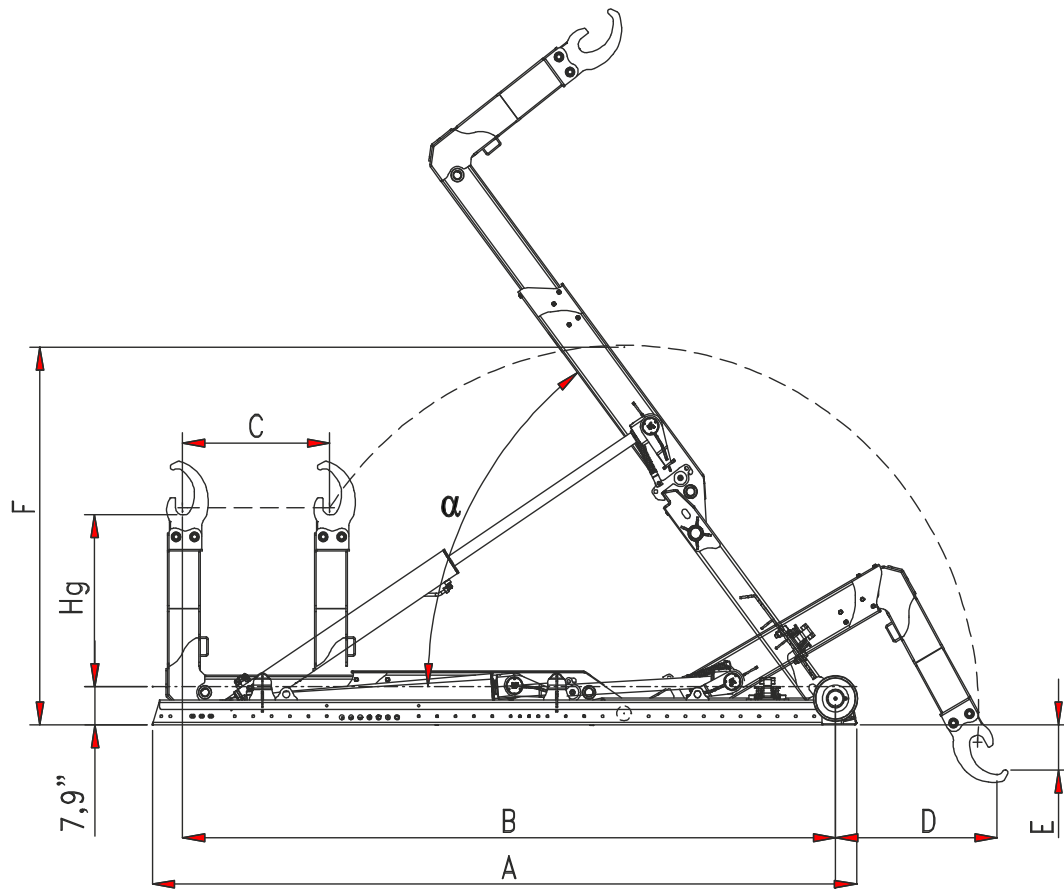


MODEL	11.000 C MS LOW ARM	11.000 N MS LOW ARM	11.000 L MS LOW ARM	11.000 XL MS LOW ARM	11.000 XXL MS LOW ARM
Hg	35,63" (905 mm)				
A	127,16" (3.230 mm)	135,03" (3.430 mm)	146,85" (3.730 mm)	150,78" (3.830 mm)	158,66" (4.030 mm)
B	116,14" (2.950 mm)	124,01" (3.150 mm)	131,88" (3.350 mm)	139,76" (3.550 mm)	147,63" (3.750 mm)
C	27,55" (700 mm)			31,5" (800 mm)	
D	39,37" (1.000 mm)	31,49" (800 mm)	38,58" (980 mm)	34,564" (880 mm)	26,77" (680 mm)
E	9" (228 mm)				
F	71,65" (1.820 mm)	71,65" (1.820 mm)	77,95" (1.980 mm)		
Weight*	1.430 lb (650 Kg)	1.450 lb (660 Kg)	1.520 lb (690 Kg)	1.540 lb (700 Kg)	1.560 lb (710 Kg)
α	51°	48°	55°	53°	50°
Container min. max.	10' – 12' (3.048–3.657 mm)	11' – 13' (3.352–3.962 mm)	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)
LIFTING CAPACITY	11.000 lb (5.000 Kg)				
TIPPING CAPACITY	11.000 lb (5.000 Kg)				

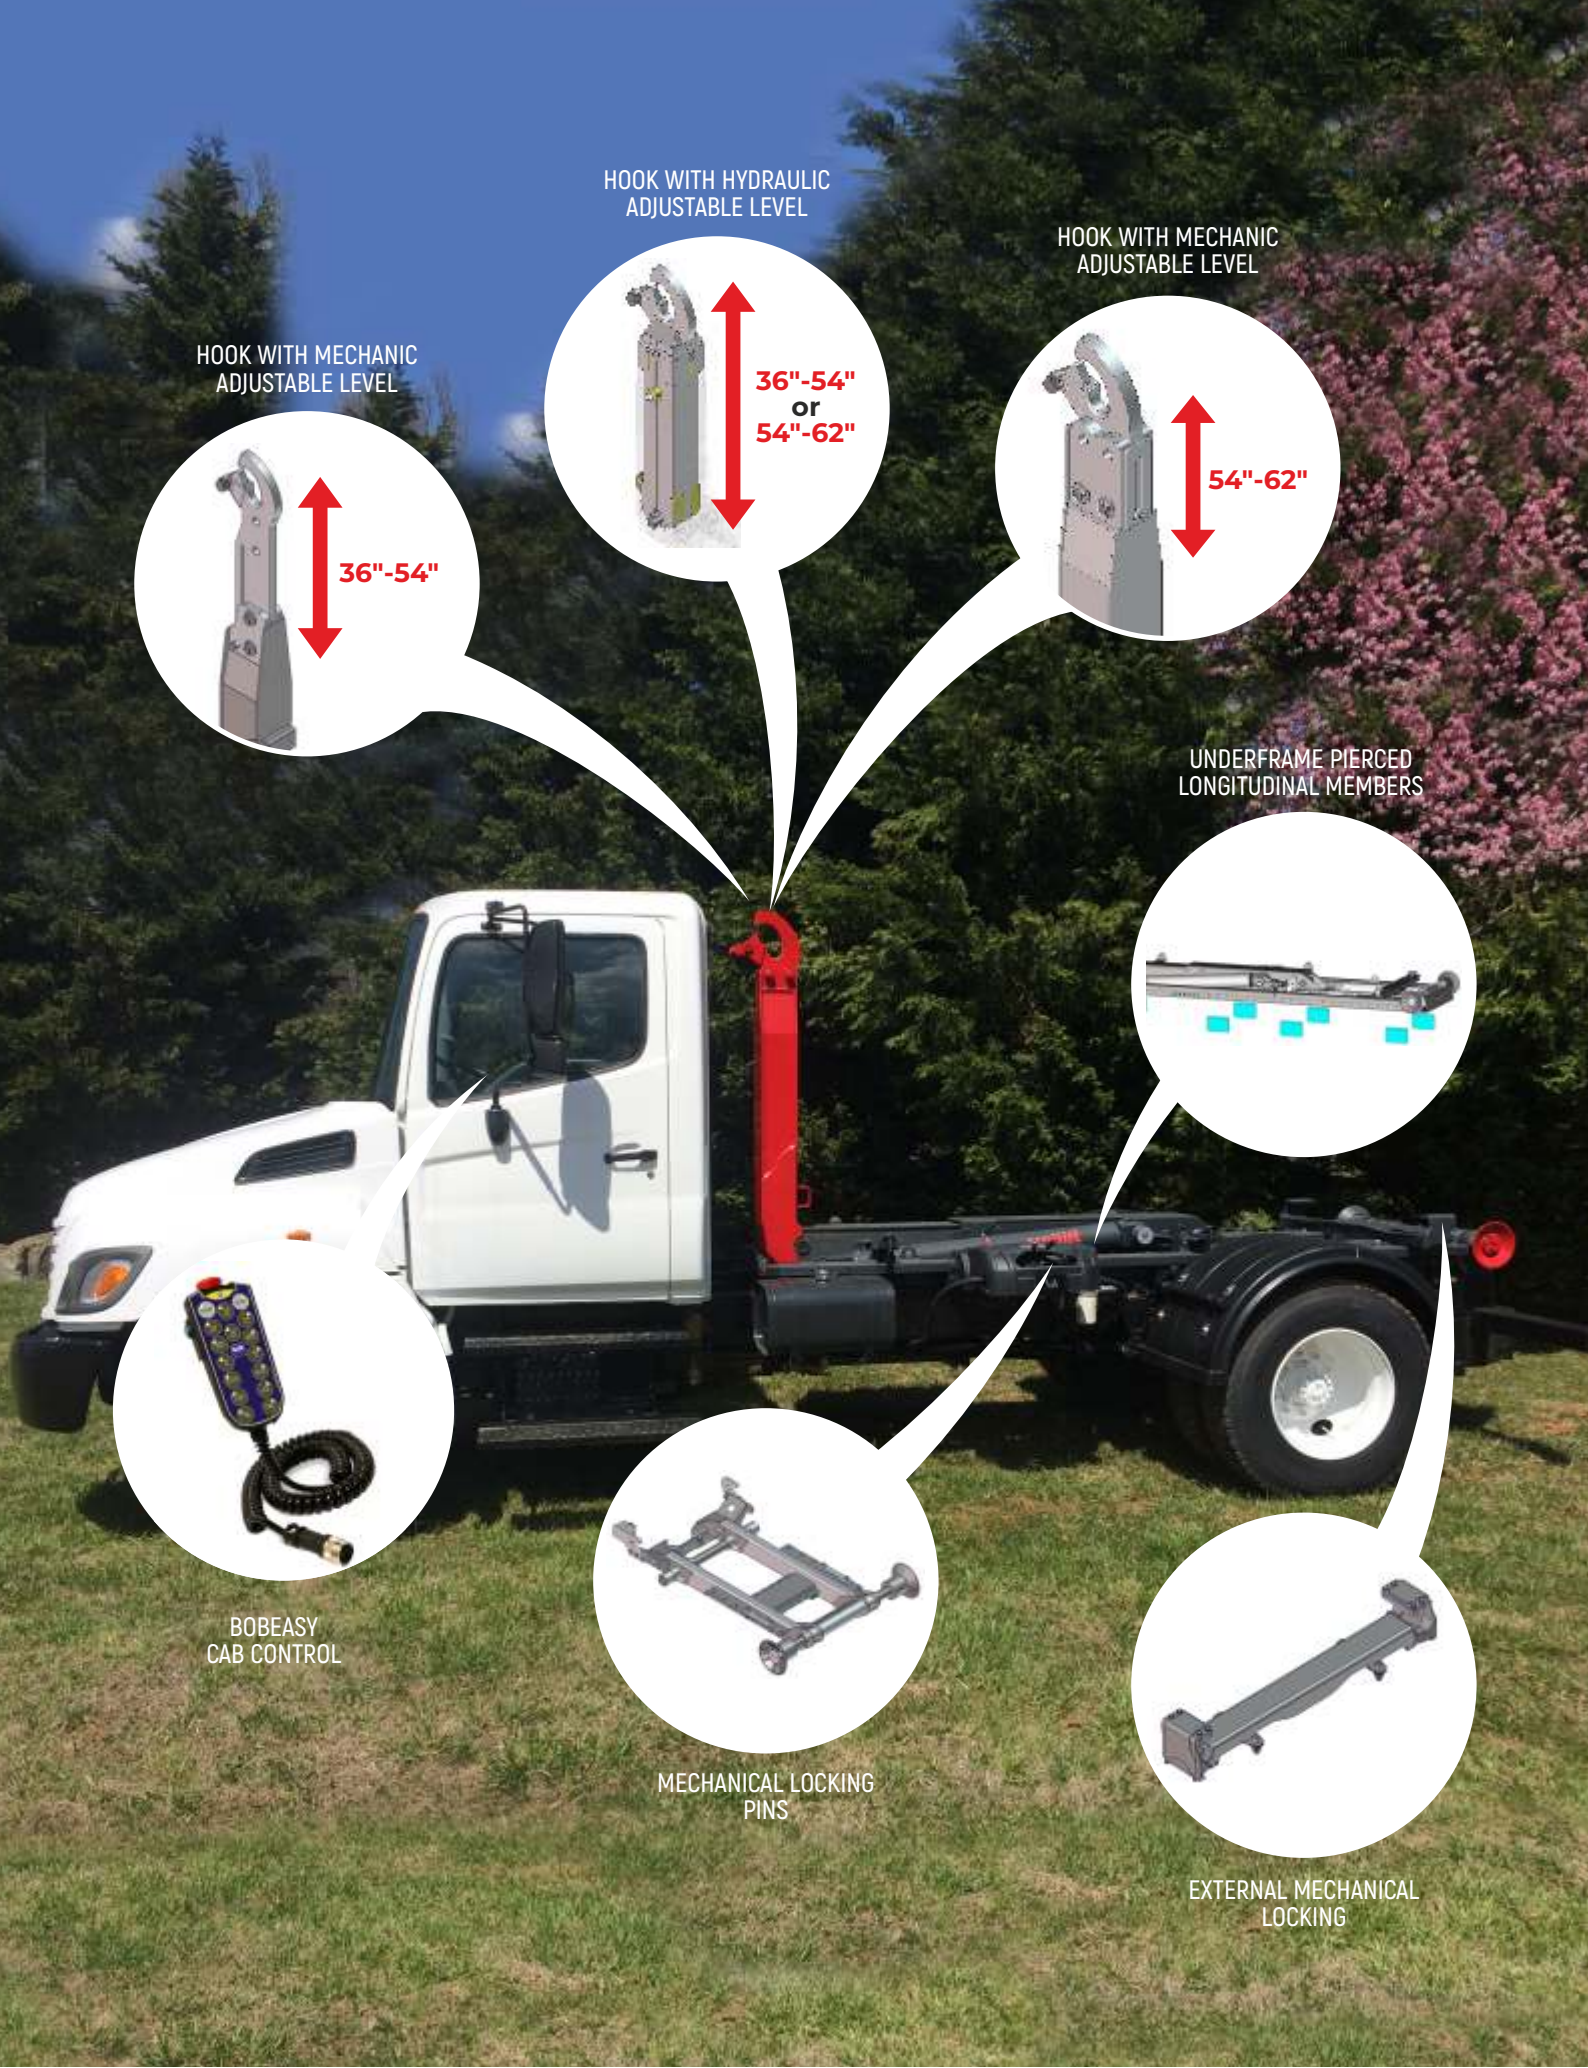


HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



BOBEASY
CAB CONTROL




MECHANICAL LOCKING
PINS



EXTERNAL MECHANICAL
LOCKING



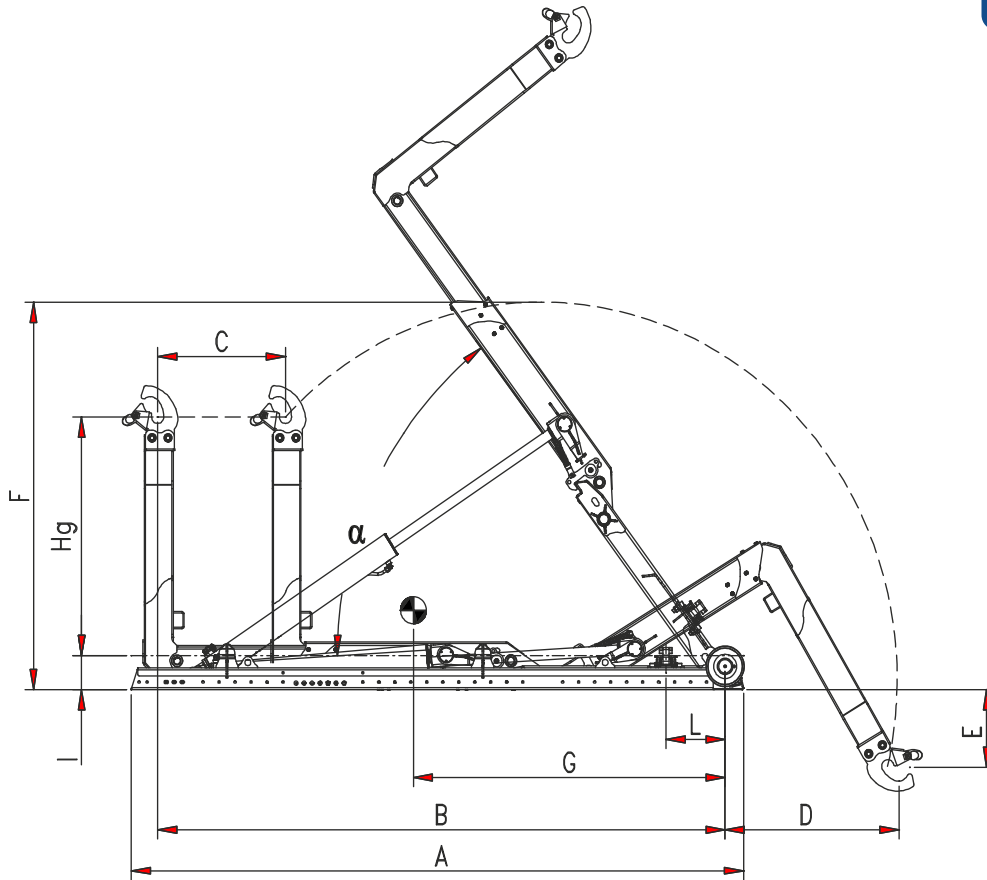


MODEL	T 18.000 XXC MS	T 18.000 XC MS	T 18.000 C MS	T 18.000 N MS	T 18.000 NL MS	T 18.000 L MS	T 18.000 XL MS
Hg	35,63"/53,88"/61,75" (905/1.369/1.569mm)						
A	146,85" (3.730 mm)	150,78" (3.830 mm)	158,66" (4.030 mm)	170,44" (4.330 mm)	178,34" (4.530 mm)	186,22" (4.730 mm)	200" (5.080 mm)
B	131,88" (3.350 mm)	139,76" (3.550 mm)	147,63" (3.750 mm)	159,44" (4.050 mm)	137,32" (4.250 mm)	175,19" (4.450 mm)	181,1" (4.600 mm)
C	27,55" (700 mm)	31,5" (800 mm)					39,37" (1.000 mm)
D	46,45" (1.180 mm)	42,51" (1.080 mm)	34,64" (880 mm)	45,66" (1.160 mm)	37,79" (960 mm)	29,92" (760 mm)	58,26" (1.480 mm)
E	19,29" (490 mm)						9,93" (100 mm)
F	89,76" (2.280 mm)			99,6" (2.530 mm)			113,38" (2.880 mm)
G	73,22" (1.860 mm)	76,77" (1.950 mm)	83,07" (2.110 mm)	88,97" (2.260 mm)	94,09" (2.390 mm)	99,21" (2.520 mm)	97,63" (2.480 mm)
I	7,87" (200 mm)						8,66" (220 mm)
L	10,62" (270 mm)	14,56" (370 mm)	22,44" (570 mm)	18,5" (470 mm)	26,37" (670 mm)		19,68" (500 mm)
Weight*	2.520 lb (1.145 Kg)	2.575 lb (1.170 Kg)	2.630 lb (1.195 Kg)	2.715 lb (1.235 Kg)	2.770 lb (1.260 Kg)	2.830 lb (1.285 Kg)	3.630 lb (1.650 Kg)
α	55°	53°	50°	53°	49°	45°	55°
Container min. max.	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	18.000 lb (8.180 Kg)						
TIPPING CAPACITY	18.000 lb (8.180 Kg)						


HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL

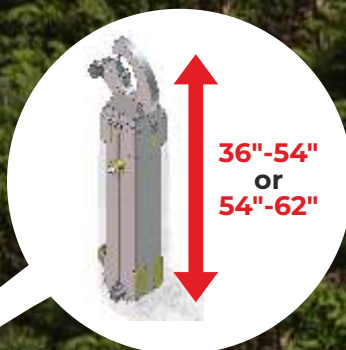

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL




EXTERNAL MECHANICAL
LOCKING




MECHANICAL LOCKING
PINS



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




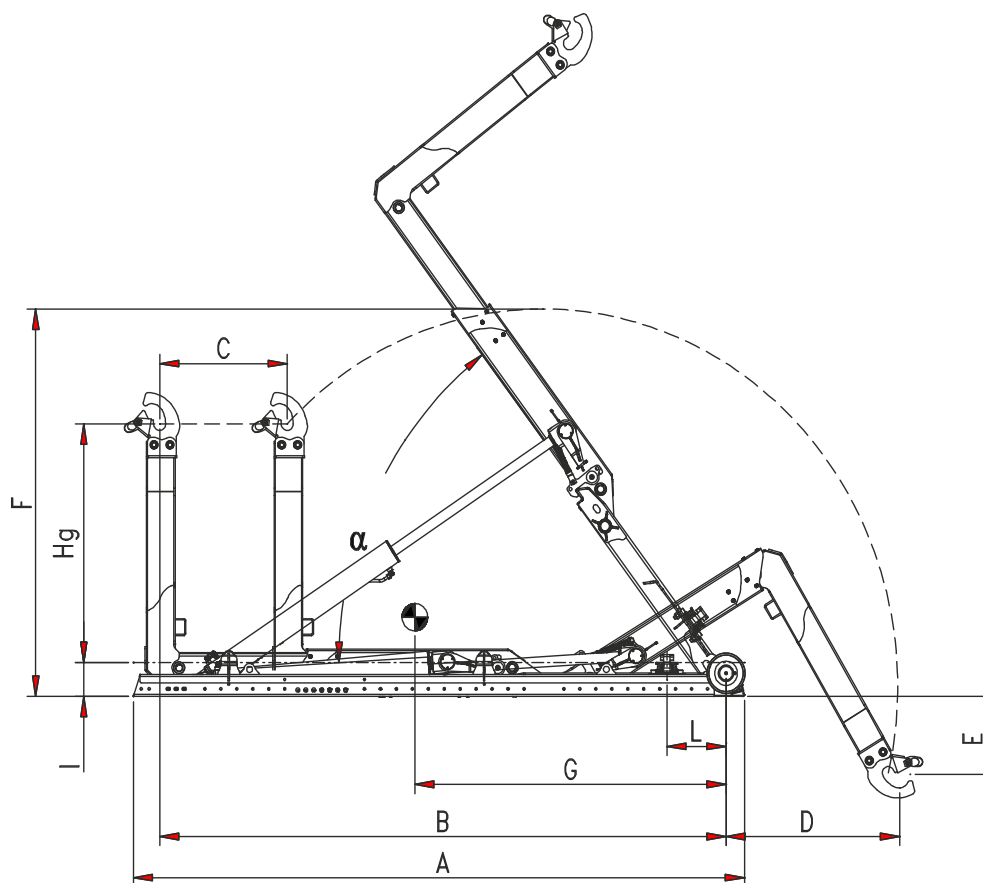


MODEL	T 20.000 XXC MS	T 20.000 XC MS	T 20.000 C MS	T 20.000 N MS	T 20.000 NL MS	T 20.000 L MS	T 20.000 XL MS
Hg	35.63"/53.88"/61.75" (905/1.369/1.569mm)						
A	146.85" (3.730 mm)	150.78" (3.830 mm)	158.66" (4.030 mm)	170.44" (4.330 mm)	178.34" (4.530 mm)	186.22" (4.730 mm)	200" (5.080 mm)
B	131.88" (3.350 mm)	139.76" (3.550 mm)	147.63" (3.750 mm)	159.44" (4.050 mm)	137.32" (4.250 mm)	175.19" (4.450 mm)	181.1" (4.600 mm)
C	27.55" (700 mm)	31.5" (800 mm)					39.37" (1.000 mm)
D	46.45" (1.180 mm)	42.51" (1.080 mm)	34.64" (880 mm)	45.66" (1.160 mm)	37.79" (960 mm)	29.92" (760 mm)	58.26" (1.480 mm)
E	19.29" (490 mm)						9.93" (100 mm)
F	89.76" (2.280 mm)			99.6" (2.530 mm)			113.38" (2.880 mm)
G	73.22" (1.860 mm)	76.77" (1.950 mm)	83.07" (2.110 mm)	88.97" (2.260 mm)	94.09" (2.390 mm)	99.21" (2.520 mm)	97.63" (2.480 mm)
I	7.87" (200 mm)						8.66" (220 mm)
L	10.62" (270 mm)	14.56" (370 mm)	22.44" (570 mm)	18.5" (470 mm)	26.37" (670 mm)		19.68" (500 mm)
Weight*	2.560 lb (1.160 Kg)	2.610 lb (1.185 Kg)	2.665 lb (1.210 Kg)	2.755 lb (1.250 Kg)	2.810 lb (1.275 Kg)	2.865 lb (1.300 Kg)	3.670 lb (1.665 Kg)
α	55°	53°	50°	53°	49°	45°	55°
Container min. max.	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	20.000 lb (9.090 Kg)						
TIPPING CAPACITY	20.000 lb (9.090 Kg)						



HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL




MECHANICAL LOCKING
PINS



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




EXTERNAL MECHANICAL
LOCKING

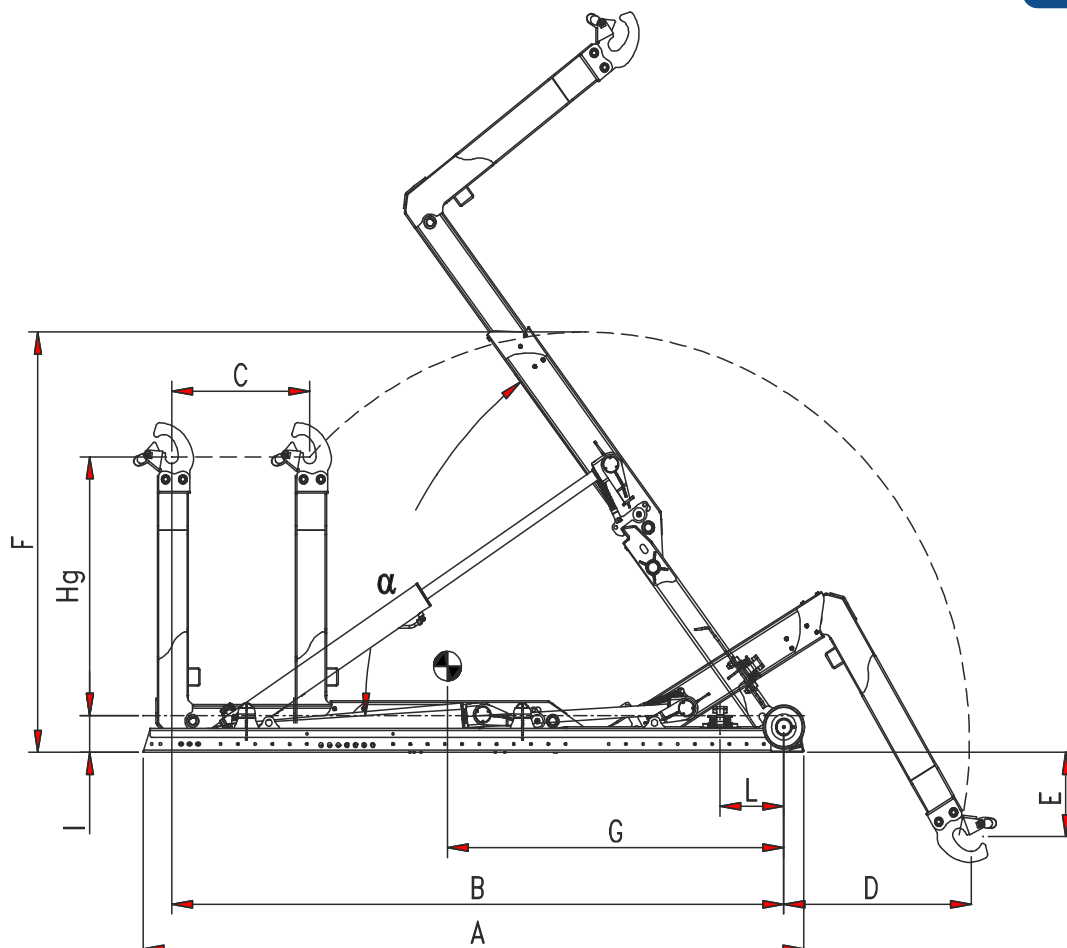


MODEL	T 22.000 XXC MS	T 22.000 XC MS	T 22.000 C MS	T 22.000 N MS	T 22.000 NL MS	T 22.000 L MS	T 22.000 XL MS
Hg	35,63"/53,88"/61,75" (905/1.369/1.569mm)						
A	146,85" (3.730 mm)	150,78" (3.830 mm)	158,66" (4.030 mm)	170,44" (4.330 mm)	178,34" (4.530 mm)	186,22" (4.730 mm)	200" (5.080 mm)
B	131,88" (3.350 mm)	139,76" (3.550 mm)	147,63" (3.750 mm)	159,44" (4.050 mm)	137,32" (4.250 mm)	175,19" (4.450 mm)	181,1" (4.600 mm)
C	27,55" (700 mm)	31,5" (800 mm)					39,37" (1.000 mm)
D	46,45" (1.180 mm)	42,51" (1.080 mm)	34,64" (880 mm)	45,66" (1.160 mm)	37,79" (960 mm)	29,92" (760 mm)	58,26" (1.480 mm)
E	19,29" (490 mm)						9,93" (100 mm)
F	89,76" (2.280 mm)			99,6" (2.530 mm)			113,38" (2.880 mm)
G	73,22" (1.860 mm)	76,77" (1.950 mm)	83,07" (2.110 mm)	88,97" (2.260 mm)	94,09" (2.390 mm)	99,21" (2.520 mm)	97,63" (2.480 mm)
I	7,87" (200 mm)						8,66" (220 mm)
L	10,62" (270 mm)	14,56" (370 mm)	22,44" (570 mm)	18,5" (470 mm)	26,37" (670 mm)		19,68" (500 mm)
Weight*	2.585 lb (1.175 Kg)	2.640 lb (1.200 Kg)	2.695 lb (1.225 Kg)	2.785 lb (1.265 Kg)	2.840 lb (1.290 Kg)	2.895 lb (1.315 Kg)	3.670 lb (1.665 Kg)
α	55°	53°	50°	53°	49°	45°	55°
Container min. max.	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	22.000 lb (10.000 Kg)						
TIPPING CAPACITY	22.000 lb (10.000 Kg)						




HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL

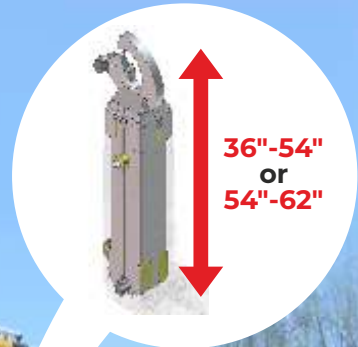

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL



MECHANICAL
LOCKING
PINS




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



EXTERNAL MECHANICAL
LOCKING



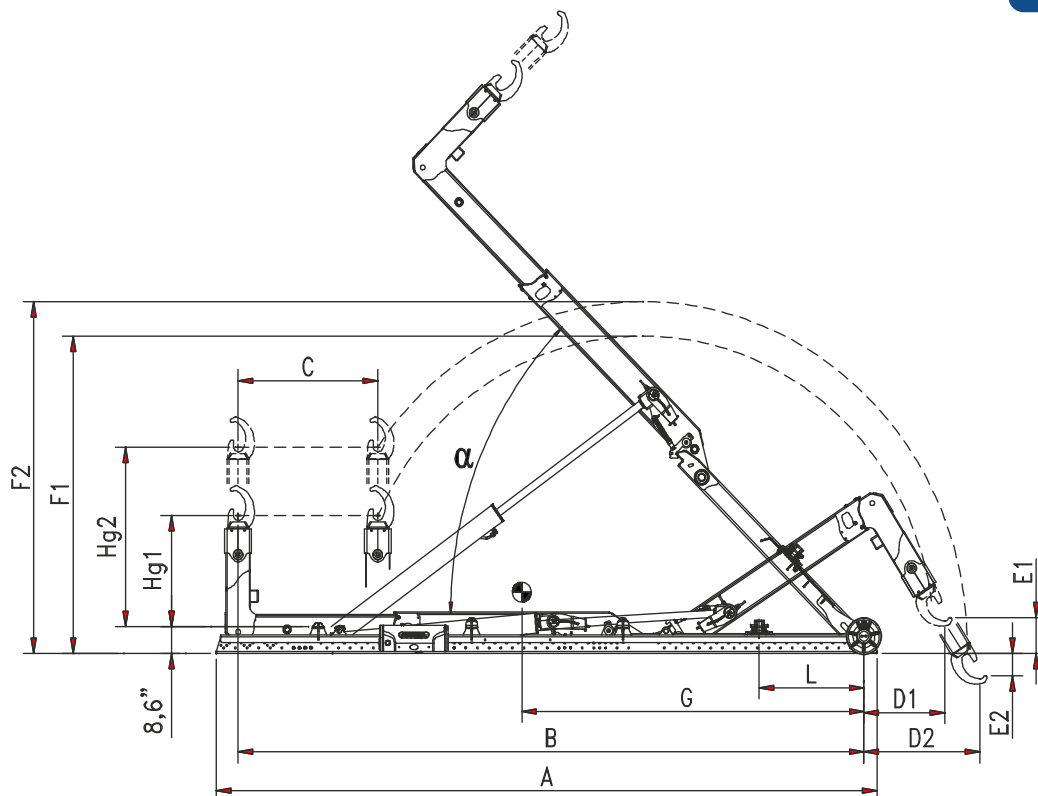


MODEL	T 22.000/6 XXC MS	T 22.000/6 XC MS	T 22.000/6 C MS	T 22.000/6 N MS	T 22.000/6 NL MS	T 22.000/6 L MS
Hg1	35,63"/53,88"/61,75" (905/1.369/1.569mm)					
Hg2	53,88" (1.369 mm)					
A	200" (5.080 mm)			207,87" (5.280 mm)	215,74" (5.480 mm)	235,43" (5.680 mm)
B	173,22" (4.400 mm)	181,1" (4.600 mm)	204,72" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200mm)	220,47" (5.400mm)
F	31,49" (800 mm)	39,37" (1.000 mm)	40,74" (1.200 mm)			
D1	49,21" (1.250 mm)			41,33" (1.050 mm)	33,46" (850 mm)	25,59" (650 mm)
D2	62,2" (1.580 mm)			54,33" (1.380 mm)	46,45" (1.180 mm)	38,58" (980 mm)
E1	9,85" (250 mm)					
E2	8,66" (220 mm)					
F1	101,57" (2.580 mm)					
F2	113,38" (2.880 mm)					
G	96,06" (2.440 mm)	97,63" (2.480 mm)	98,81" (2.510 mm)	104,72" (2.660 mm)	110,23" (2.800 mm)	115,74" (2.940 mm)
L	19,64" (500 mm)			27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	3.760 lb (1.705Kg)			3.835 lb (1.740 Kg)	3.890 lb (1.765 Kg)	3.945 lb (1.790 Kg)
Container min max	55°			51°	48°	45°
LIFTING CAPACITY Hg1	14' – 17' (4.270–5.181 mm)	14' – 17' (4.270–5.181mm)	14' – 18' (4.267–5.486 mm)	14' – 19' (4.267–5.791 mm)	15' – 20' (4.572–6.096 mm)	16' – 20' (4.876–6.096 mm)
LIFTING CAPACITY Hg2	22.000 lb (10.000 Kg)					
TIPPING CAPACITY	26.000 lb (11.820 Kg)					
	26.000 lb (11.820 Kg)					

HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL

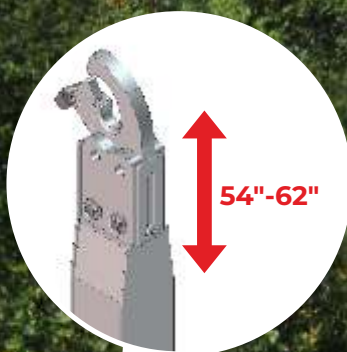

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL




EXTERNAL MECHANICAL
LOCKING



MECHANICAL LOCKING
PINS





UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

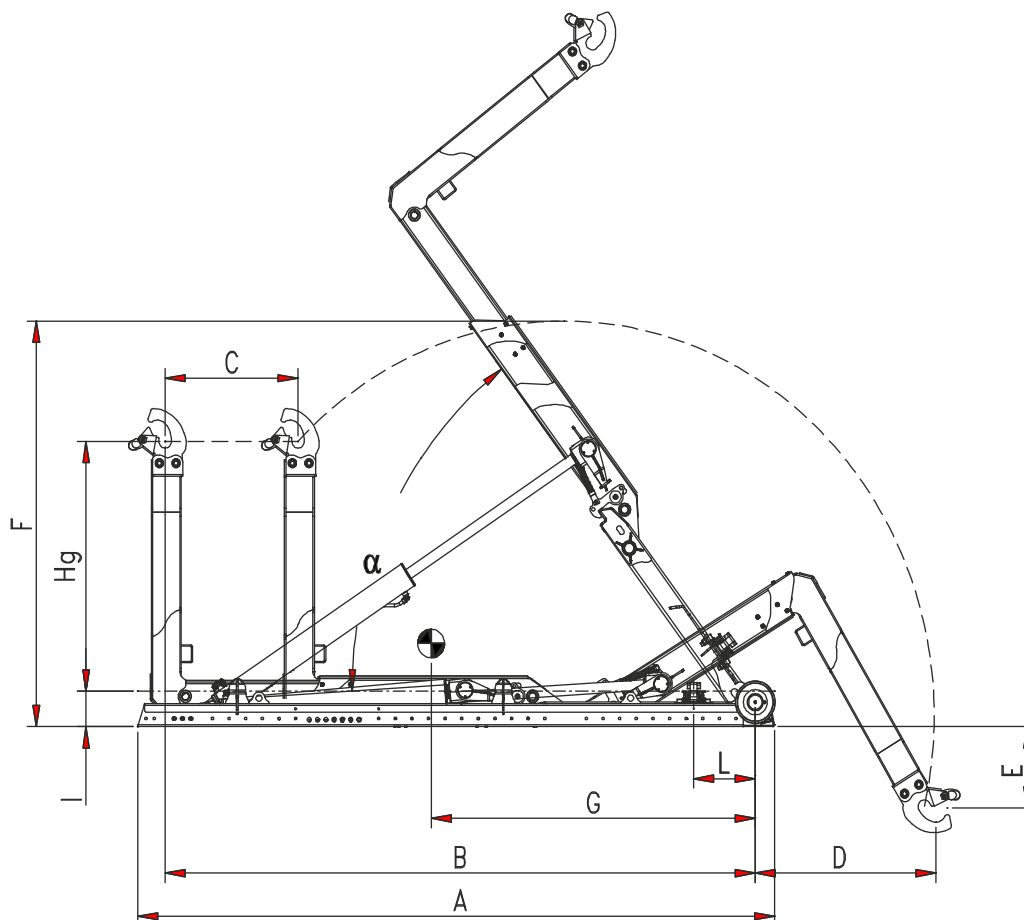

MODEL	T 26.000 XXC MS	T 26.000 XC MS	T 26.000 C MS	T 26.000 N MS	T 26.000 NL MS	T 26.000 L MS	T 26.000 XL MS
Hg	35.63"/53.88"/61.75" (905/1.369/1.569mm)						
A	146.85" (3.730 mm)	150.78" (3.830 mm)	158.66" (4.030 mm)	170.44" (4.330 mm)	178.34" (4.530 mm)	186.22" (4.730 mm)	200" (5.080 mm)
B	131.88" (3.350 mm)	139.76" (3.550 mm)	147.63" (3.750 mm)	159.44" (4.050 mm)	137.32" (4.250 mm)	175.19" (4.450 mm)	181.1" (4.600 mm)
C	27.55" (700 mm)	31.5" (800 mm)					39.37" (1.000 mm)
D	46.45" (1.180 mm)	42.51" (1.080 mm)	34.64" (880 mm)	45.66" (1.160 mm)	37.79" (960 mm)	29.92" (760 mm)	58.26" (1.480 mm)
E	19.29" (490 mm)						
F	89.76" (2.280 mm)			99.6" (2.530 mm)			113.38" (2.880 mm)
G	73.22" (1.860 mm)	76.77" (1.950 mm)	83.07" (2.110 mm)	88.97" (2.260 mm)	94.09" (2.390 mm)	99.21" (2.520 mm)	97.63" (2.480 mm)
I				7.87" (200 mm)			8.66" (220 mm)
L	10.62" (270 mm)	14.56" (370 mm)	22.44" (570 mm)	18.5" (470 mm)	26.37" (670 mm)		19.68" (500 mm)
Weight*	2.610 lb (1.185 Kg)	2.665 lb (1.210 Kg)	2.720 lb (1.235 Kg)	2.820 lb (1.280 Kg)	2.870 lb (1.305 Kg)	2.930 lb (1.330 Kg)	3.670 lb (1.665 Kg)
α	55°	53°	50°	53°	49°	45°	55°
Container min. max.	12' - 13' (3.657-3.962 mm)	12' - 14' (3.657-4.267 mm)	13' - 15' (3.962-4.572 mm)	13' - 16' (3.962-4.876 mm)	14' - 16' (4.267-4.876 mm)	14' - 17' (4.267-5.181 mm)	14' - 17' (4.267-5.181 mm)
LIFTING CAPACITY	26.000 lb (11.820 Kg)						
TIPPING CAPACITY	26.000 lb (11.820 Kg)						

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

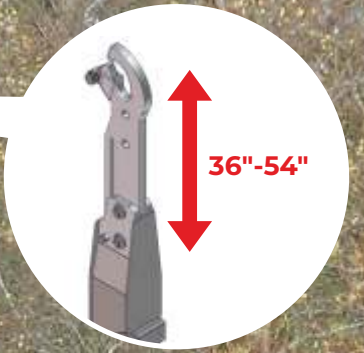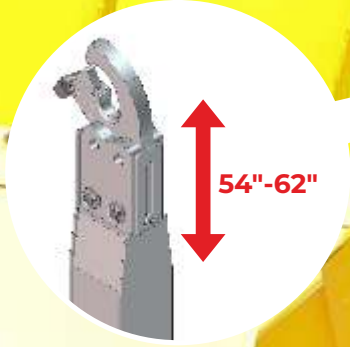

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL




EXTERNAL
MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




BOBEASY
CAB CONTROL

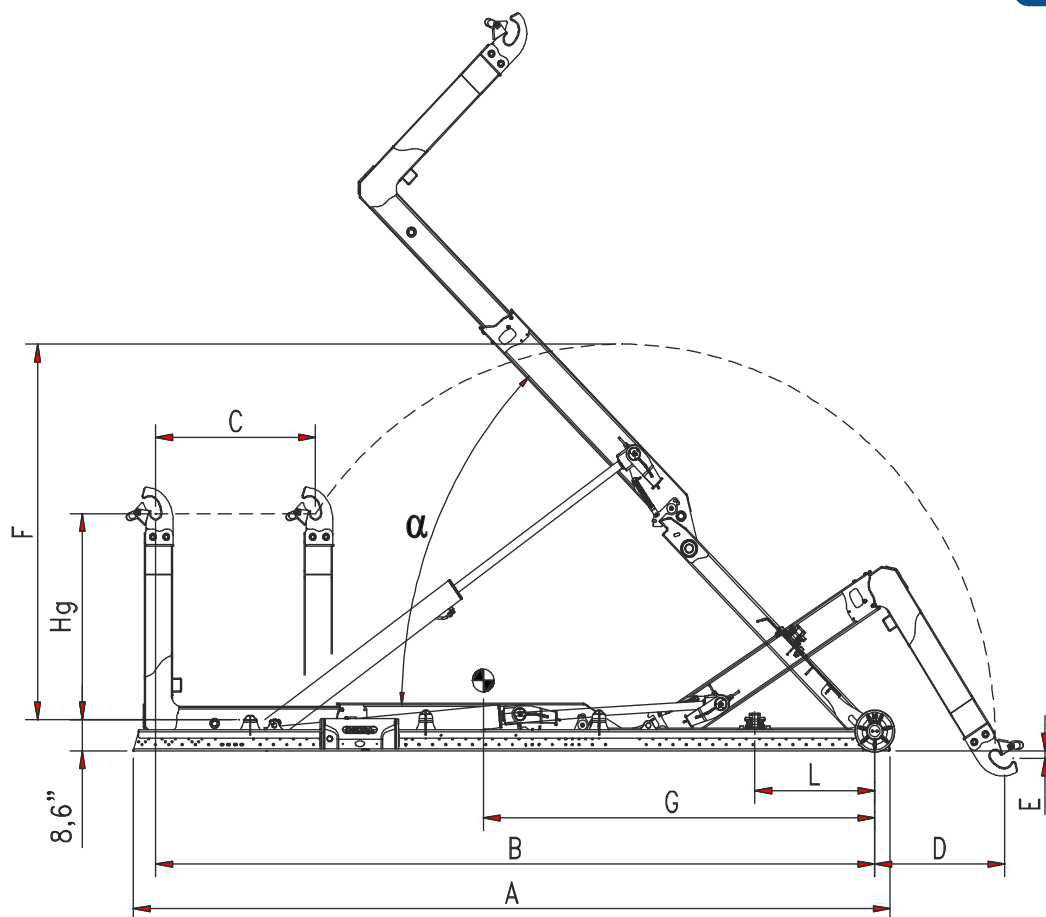

MODEL	T 26.000/6 NC MS	T 26.000/6 N MS	T 26.000/6 NL MS	T 26.000/6 L MS
Hg	35,63"/53,88"/61,75" (905/1.369/1.569mm)			
A	200" (5.080 mm)	207,87" (5.280 mm)	215,74" (5.480 mm)	235,43" (5.680 mm)
B	204,72" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200mm)	220,47" (5.400mm)
C	40,74" (1.200 mm)			
D	62,2" (1.580 mm)	54,33" (1.380 mm)	46,45" (1.180 mm)	38,58" (980 mm)
E	3,93" (100 mm)			
F	113,38" (2.880 mm)			
G	98,81" (2.510 mm)	104,72" (2.660 mm)	110,23" (2.800 mm)	115,74" (2.940 mm)
L	19,64" (500 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	3.670 lb (1.665Kg)	3.725 lb (1.690 Kg)	3.780 lb (1.715 Kg)	3.835 lb (1.740 Kg)
α	55°	51°	48°	45°
Container min. max.	14' – 18' (4.267–5.486 mm)	14' – 19' (4.267–5.791 mm)	15' – 20' (4.572–6.096 mm)	16' – 21' (4.876–6.400 mm)
LIFTING CAPACITY	26.000 lb (11.820 Kg)			
TIPPING CAPACITY	26.000 lb (11.820 Kg)			

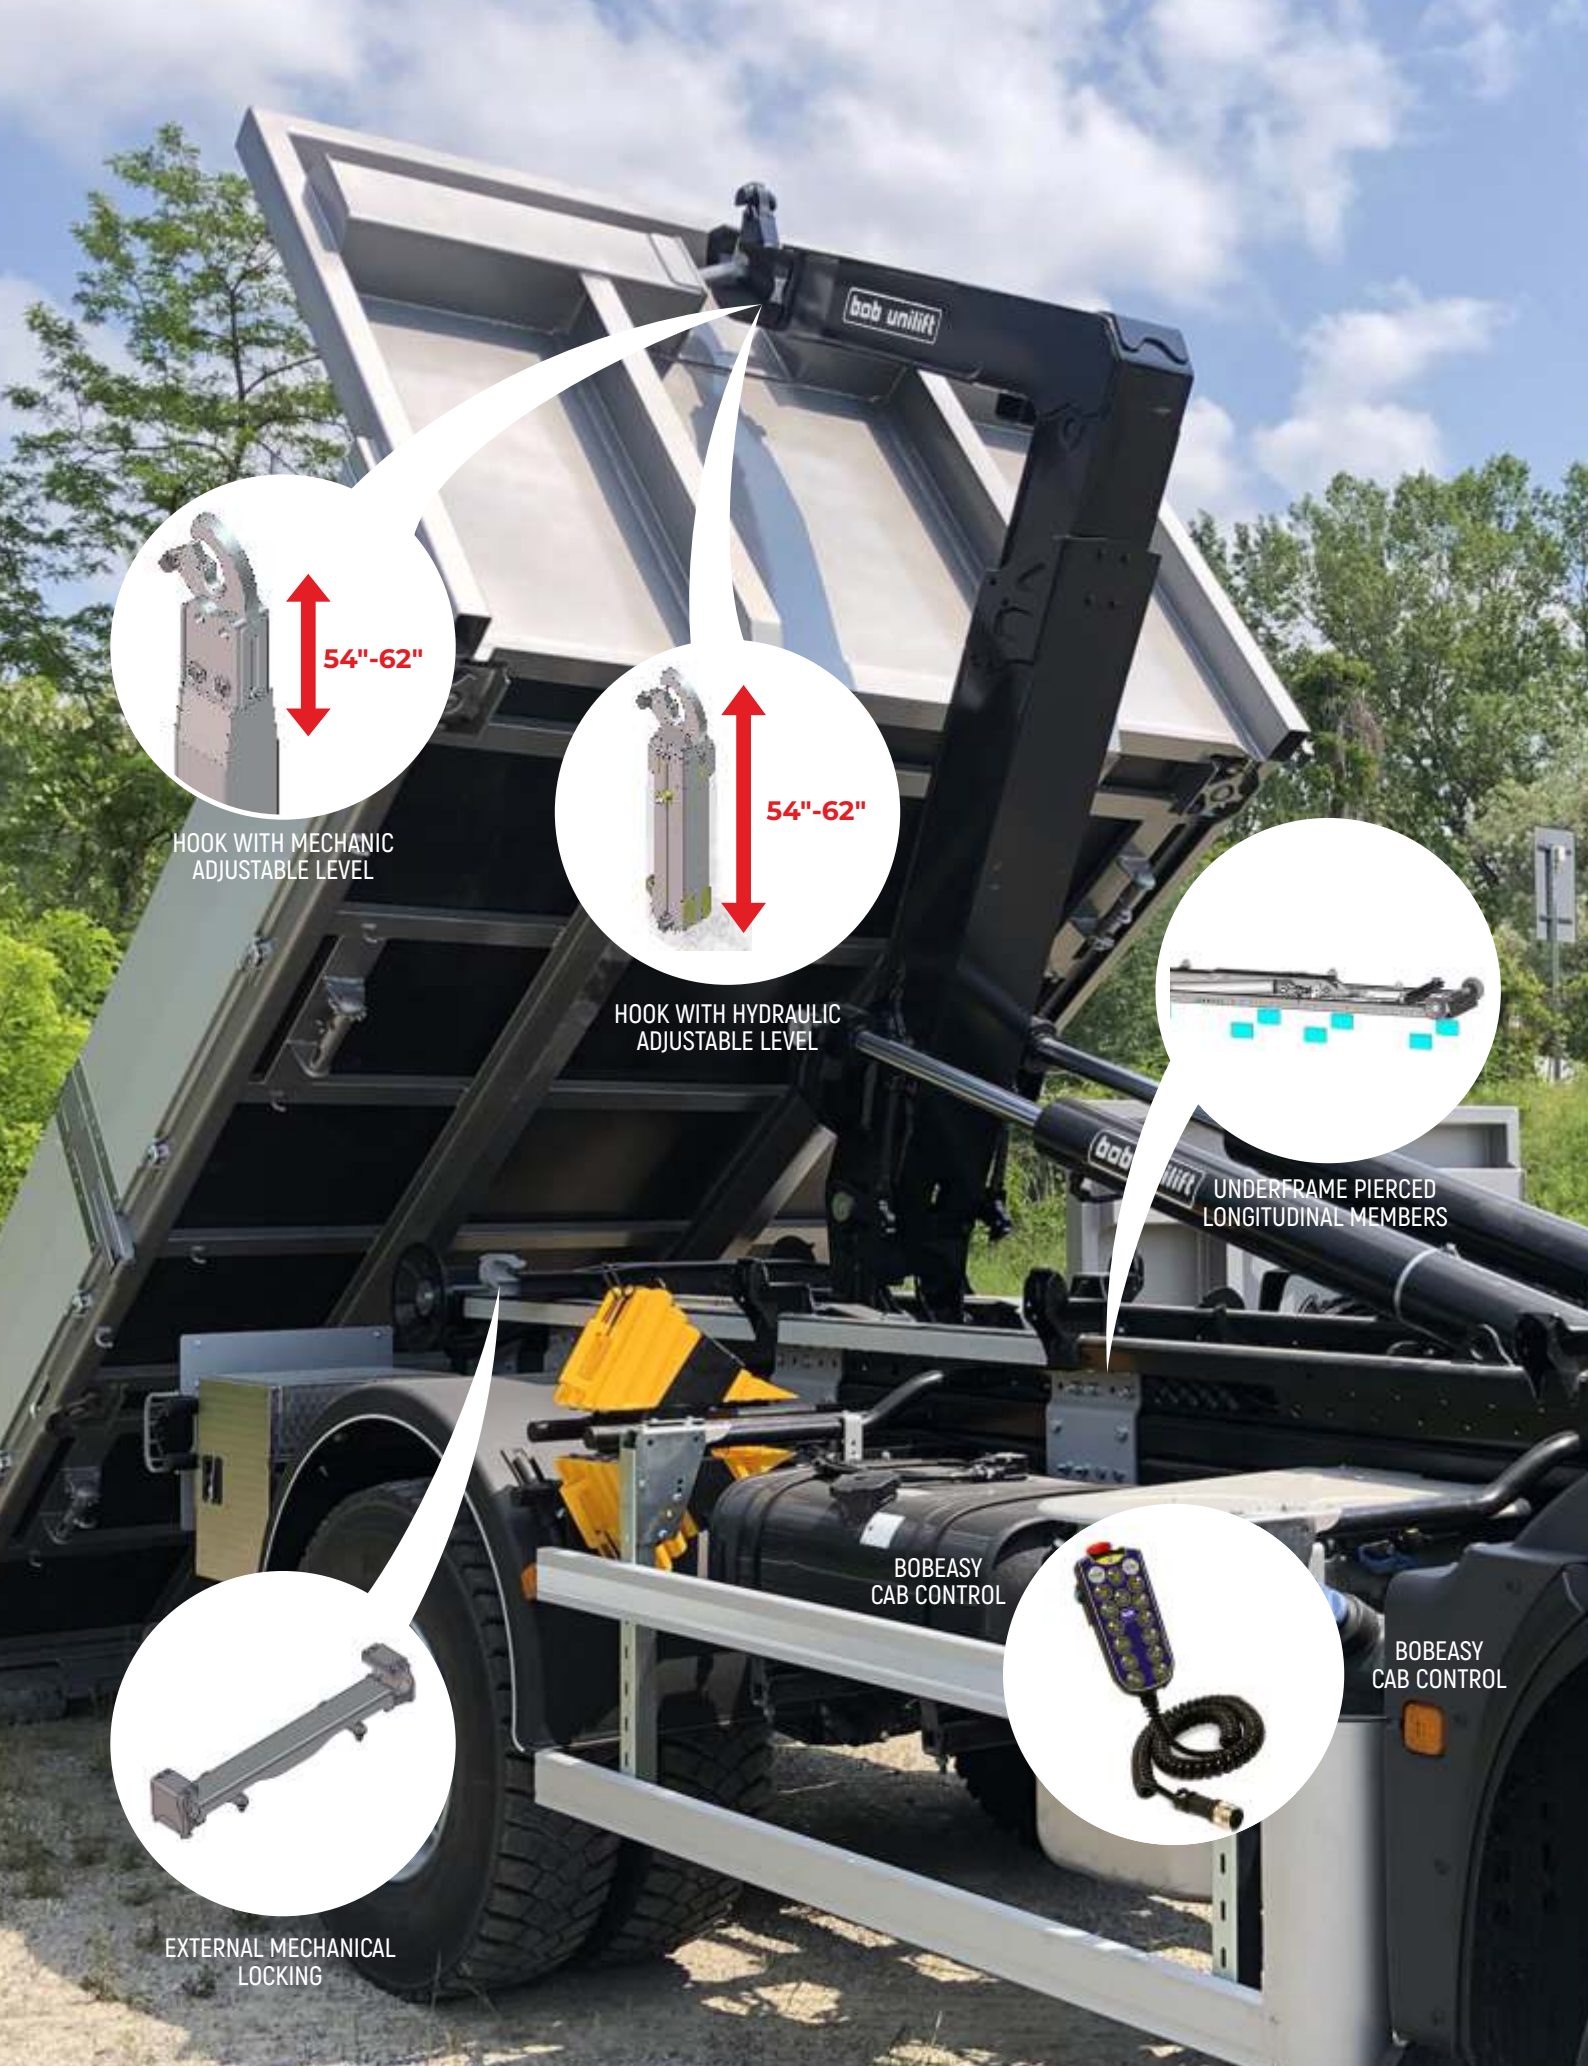

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

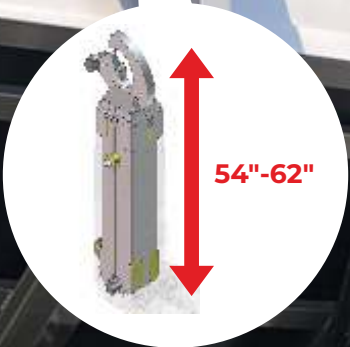

HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




EXTERNAL MECHANICAL
LOCKING



BOBEASY
CAB CONTROL

BOBEASY
CAB CONTROL

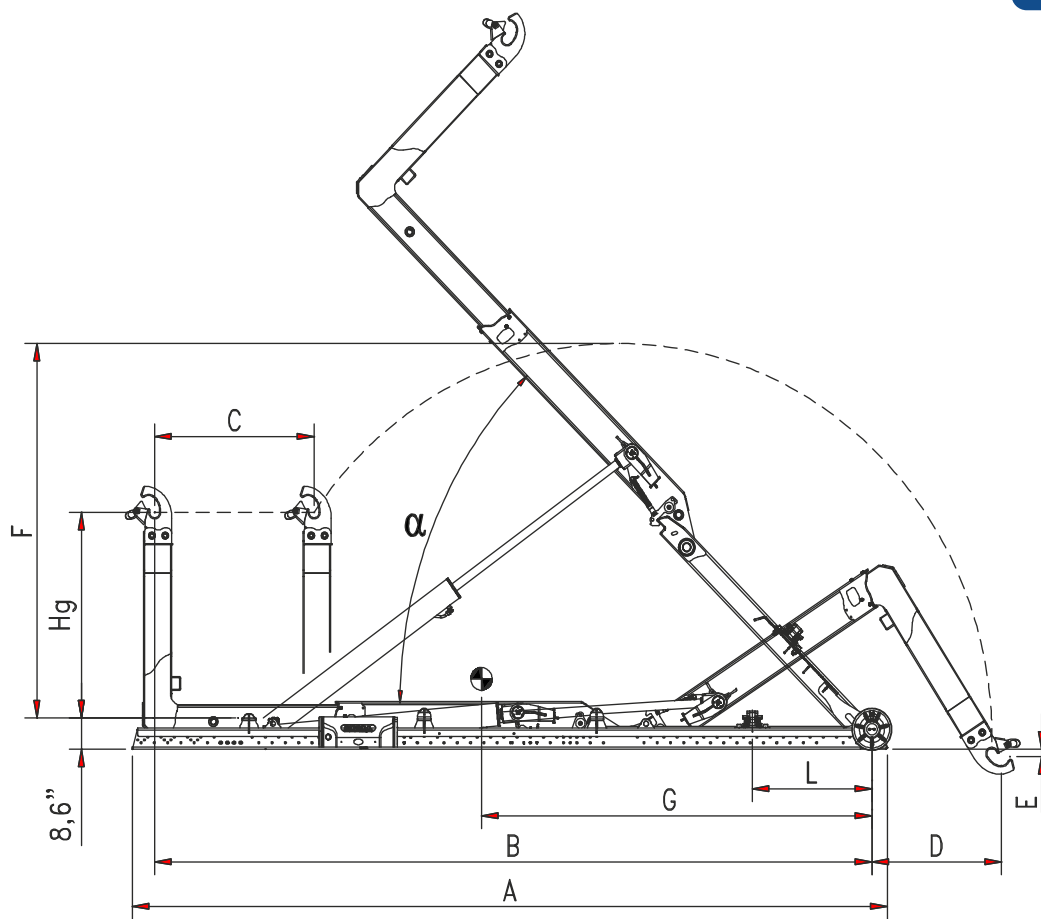

MODEL	T 31.000 XC MS	T 31.000 C MS	T 31.000 NC MS	T 31.000 N MS	T 31.000 NL MS	T 31.000 L MS
Hg	53,88"/61,75" (1.369/1.569 mm)					
A	200" (5.080 mm)			207,87" (5.280 mm)	215,74" (5.480 mm)	235,43" (5.680 mm)
B	173,22" (4.400 mm)	181,1" (4.600 mm)	204,72" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200mm)	220,47" (5.400mm)
C	31,49" (800 mm)	39,37" (1.000 mm)	40,74" (1.200 mm)			
D	62.2" (1.580 mm)			54.33" (1.380 mm)	46,45" (1.180 mm)	38,58" (980 mm)
E		3,93" (100 mm)				
F	113,38" (2.880 mm)					
G	96,06" (2.440 mm)	97,63" (2.480 mm)	98,81" (2.510 mm)	104,72" (2.660 mm)	110,23" (2.800 mm)	115,74" (2.940 mm)
L	19,64" (500 mm)			27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	3.700 lb (1.685Kg)			3.760 lb (1.710 Kg)	3.820 lb (1.735 Kg)	3.870 lb (1.760 Kg)
α	55°			51°	48°	45°
Container min. max.	14' – 17' (4.270–5.181 mm)		14' – 18' (4.267–5.486 mm)	14' – 19' (4.267–5.791 mm)	15' – 20' (4.572–6.096 mm)	16' – 21' (4.876–6.400 mm)
LIFTING CAPACITY	31.000 lb (14.090 Kg)					
TIPPING CAPACITY	31.000 lb (14.090 Kg)					

HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



EXTERNAL MECHANICAL
LOCKING



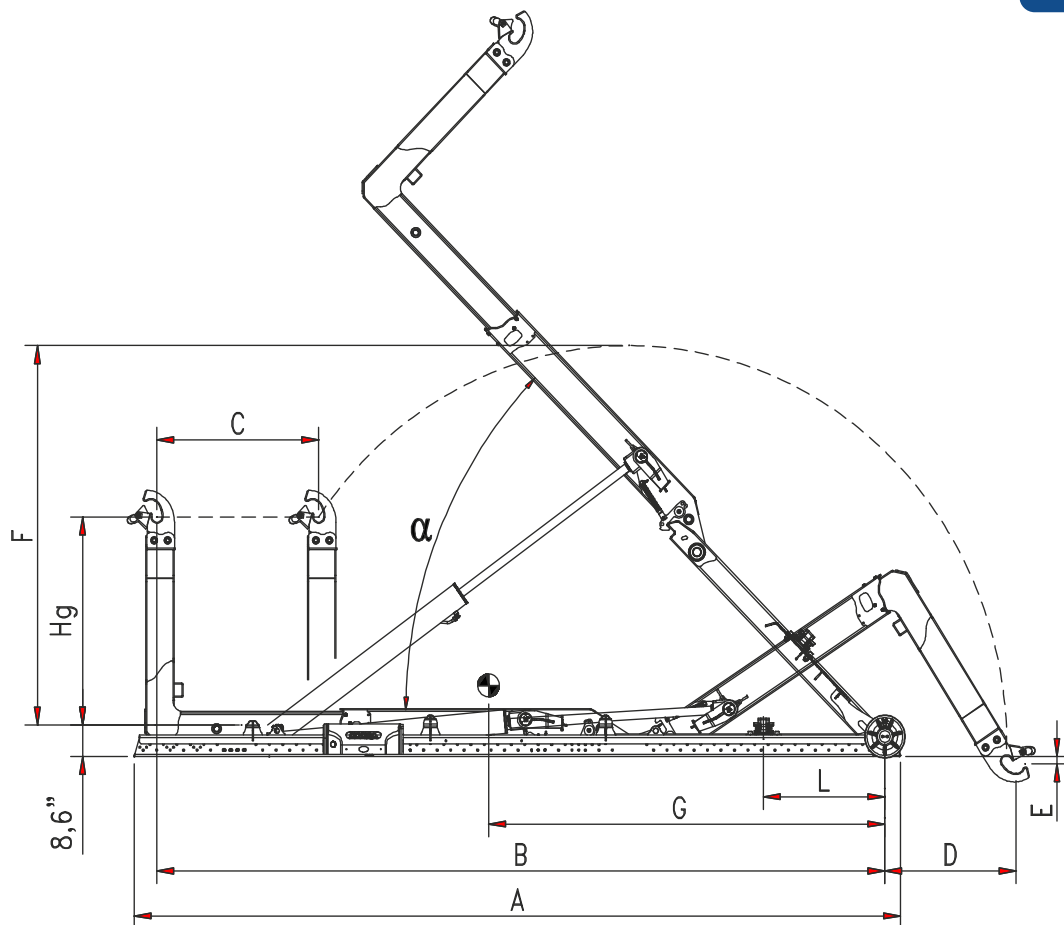

MODEL	T 35.000 XC MS	T 35.000 C MS	T 35.000 NC MS	T 35.000 N MS	T 35.000 NL MS	T 35.000 L MS
Hg	53,88"/61,75" (1.369/1.569 mm)					
A	200" (5.080 mm)			207,87" (5.280 mm)	215,74" (5.480 mm)	235,43" (5.680 mm)
B	173,22" (4.400 mm)	181,1" (4.600 mm)	204,72" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200mm)	220,47" (5.400mm)
C	31,49" (800 mm)	39,37" (1.000 mm)	40,74" (1.200 mm)			
D	62,2" (1.580 mm)			54,33" (1.380 mm)	46,45" (1.180 mm)	38,58" (980 mm)
E		3,93" (100 mm)				
F	113,38" (2.880 mm)					
G	96,06" (2.440 mm)	97,63" (2.480 mm)	98,81" (2.510 mm)	104,72" (2.660 mm)	110,23" (2.800 mm)	115,74" (2.940 mm)
L	19,64" (500 mm)			27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	3.770 lb (1.715Kg)			3.830 lb (1.740 Kg)	3.880 lb (1.765 Kg)	3.940 lb (1.790 Kg)
α	55°	55°	55°	51°	48°	45°
Container min. max.	14' – 17' (4.270–5.181 mm)		14' – 18' (4.267–5.486 mm)	14' – 19' (4.267–5.791 mm)	15' – 20' (4.572–6.096 mm)	16' – 21' (4.876–6.400 mm)
LIFTING CAPACITY	35.000 lb (15.910 Kg)					
TIPPING CAPACITY	35.000 lb (15.910 Kg)					



BOBEASY
CAB CONTROL

HOOK WITH MECHANIC
ADJUSTABLE LEVEL


54"-62"

HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL

54"-62"


EXTERNAL MECHANICAL
LOCKING

UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

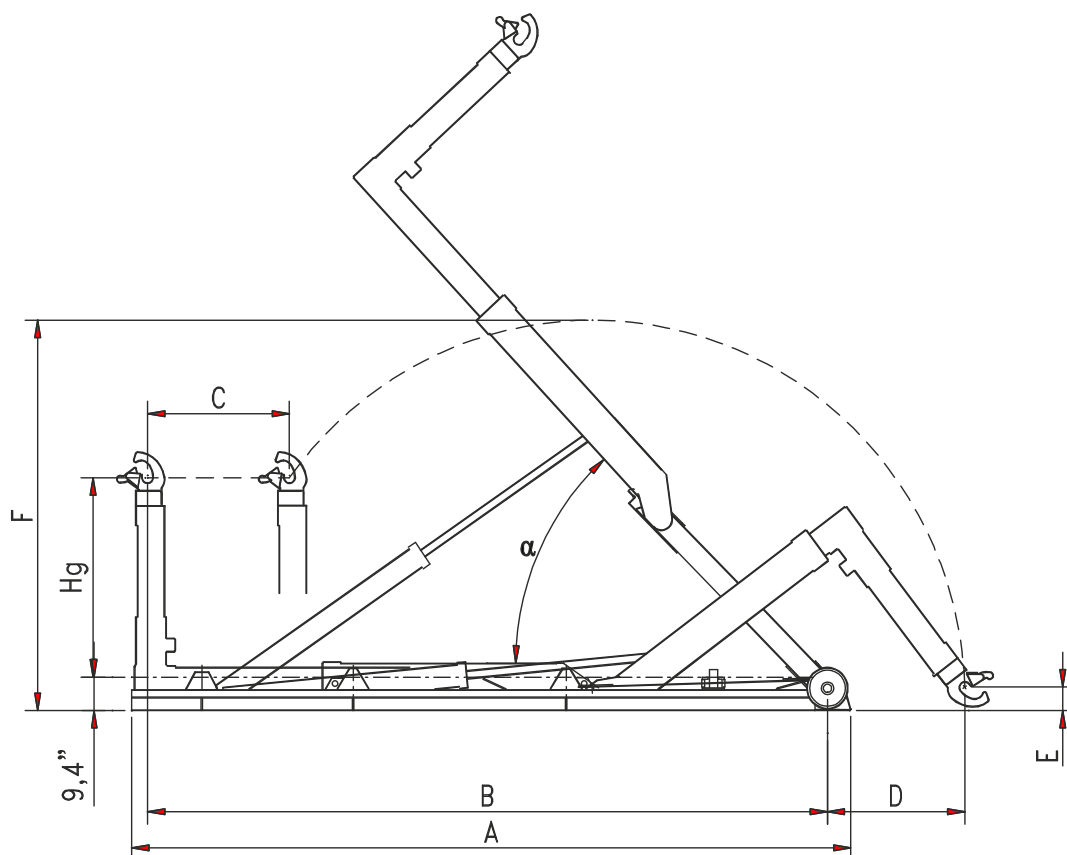


MODEL	T 40.000 C	T 40.000 NC	T 40.000 6N	T 40.000 6 NL	T 40.000 6L
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	189,76" (4.820 mm)	197,63" (5.020 mm)	219,68" (5.580 mm)	227,55" (5.780 mm)	235,43" (5.980 mm)
B	177,95" (4.520 mm)	185,82" (4.720 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600mm)
C	40,74" (1.035 mm)				
D	55,11" (1.400 mm)	47,24" (1.200 mm)	50" (1.270 mm)	42,12" (1.070 mm)	34,25" (870 mm)
E	5,9" (150 mm)		9,44" (240 mm)		
F	110,23" (2.800 mm)		118,11" (3.000 mm)		
Weight*	4.510 lb (2.050Kg)	4.570 lb (2.080 Kg)	4.730 lb (2.150 Kg)	4.790 lb (2.180 Kg)	4.860 lb (2.210 Kg)
α	55°	51°	49°	46°	44°
Container min. max.	13' – 18' (3.960 – 5.480 mm)	14' – 19' (4.270 – 5.790mm)	15' – 20' (4.570 – 6.090 mm)	16' – 21' (4.870 – 6.400 mm)	17' – 22' (5.180 – 6.700 mm)
LIFTING CAPACITY	40.000 lb (18.180 Kg)				
TIPPING CAPACITY	40.000 lb (18.180 Kg)				


HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL




BOBEASY
CAB CONTROL



EXTERNAL MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

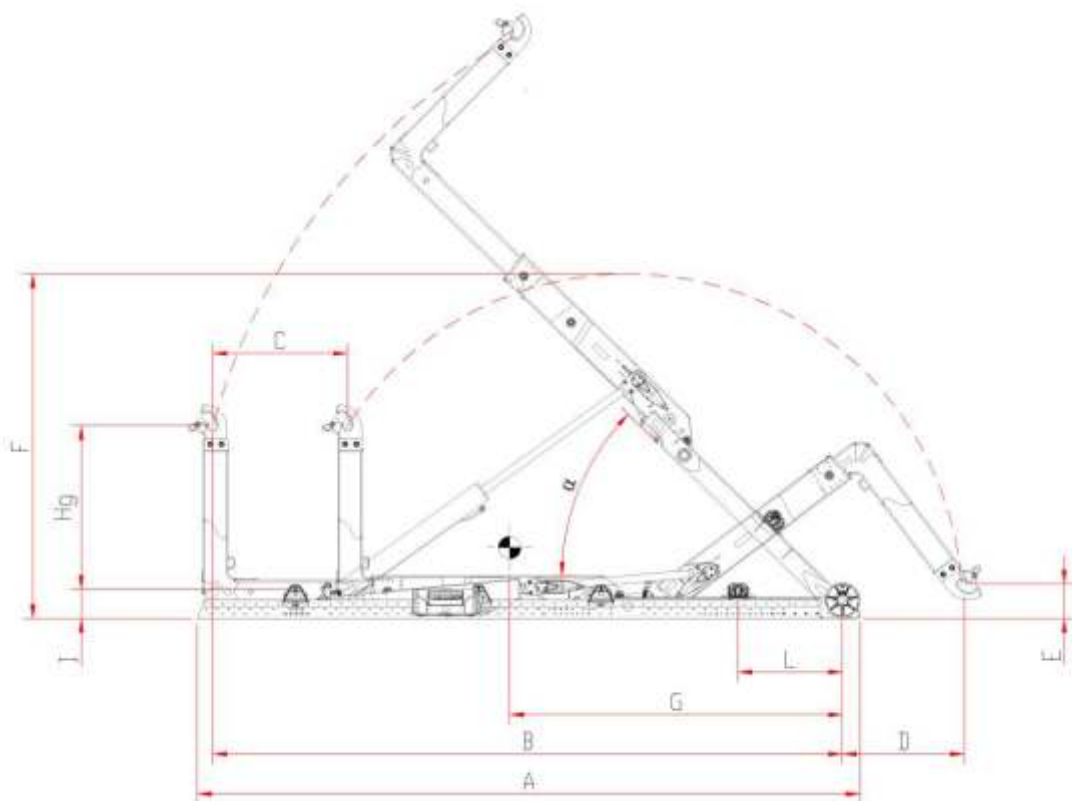


MODEL	T 50.000 XC MS	T 50.000 C MS	T 50.000 NC MS	T 50.000 N MS	T 50.000 NL MS	T 50.000 L MS	T 50.000 XL MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	191,33" (4.860 mm)	199,21" (5.060mm)	207,08" (5.260 mm)	214,96" (5.460 mm)	222,83" (5.660 mm)	230,70" (5.860mm)	238,58" (6.060 mm)
B	181,1" (4.600 mm)	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)	228,34" (5.800 mm)
C	31,49" (800 mm)	39,37" (1000 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)
D	66,92" (1.700 mm)	66,92" (1.700 mm)	66,92" (1.700 mm)	59,05" (1.500 mm)	51,18" (1.300 mm)	43,3" (1100 mm)	35,43" (1.480 mm)
E	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)
F	120,86" (3.070 mm)	120,86" (3.070 mm))	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070mm)	120,86" (3.070 mm)
G	98,42" (2.500 mm)	100,39" (2.550 mm)	102,36" (2.600 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050mm)	124,01" (3.150 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	10,62" (450 mm)	14,56" (450 mm)	22,44" (450 mm)	21,65" (550 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.555 lb (2.520 Kg)	5.621 lb (2.550 Kg)	5.687 lb (2.580 Kg)	5.732 lb (2.600 Kg)
α	55°	55°	55°	52°	49°	46°	43°
Container min. max.	12' - 13' (3.657-3.962 mm)	12' - 14' (3.657-4.267 mm)	13' - 15' (3.962-4.572 mm)	13' - 16' (3.962-4.876 mm)	14' - 16' (4.267-4.876 mm)	14' - 17' (4.267-5.181 mm)	14' - 17' (4.267-5.181 mm)
LIFTING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)
TIPPING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (25.679 Kg)	50.000 lb (25.679 Kg)	50.000 lb (25.679 Kg)	50.000 lb (25.679 Kg)

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

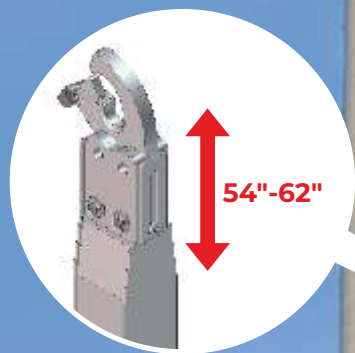


HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



BOBEASY
WIRVE CAB CONTROL




ADDITIONAL
WEARING PADS

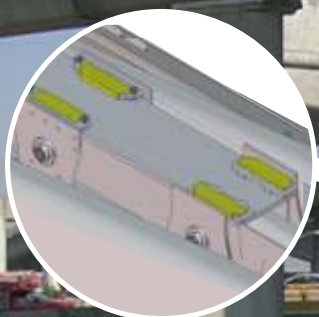

BOLTED INTERCHANGEABLE
CONTAINER SUPPORT




EXTERNAL MECHANICAL
LOCKING

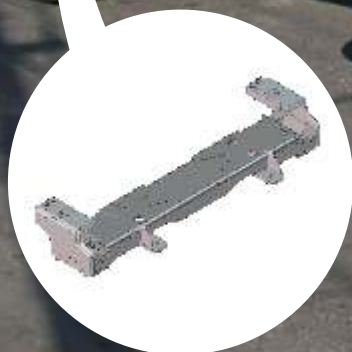

UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




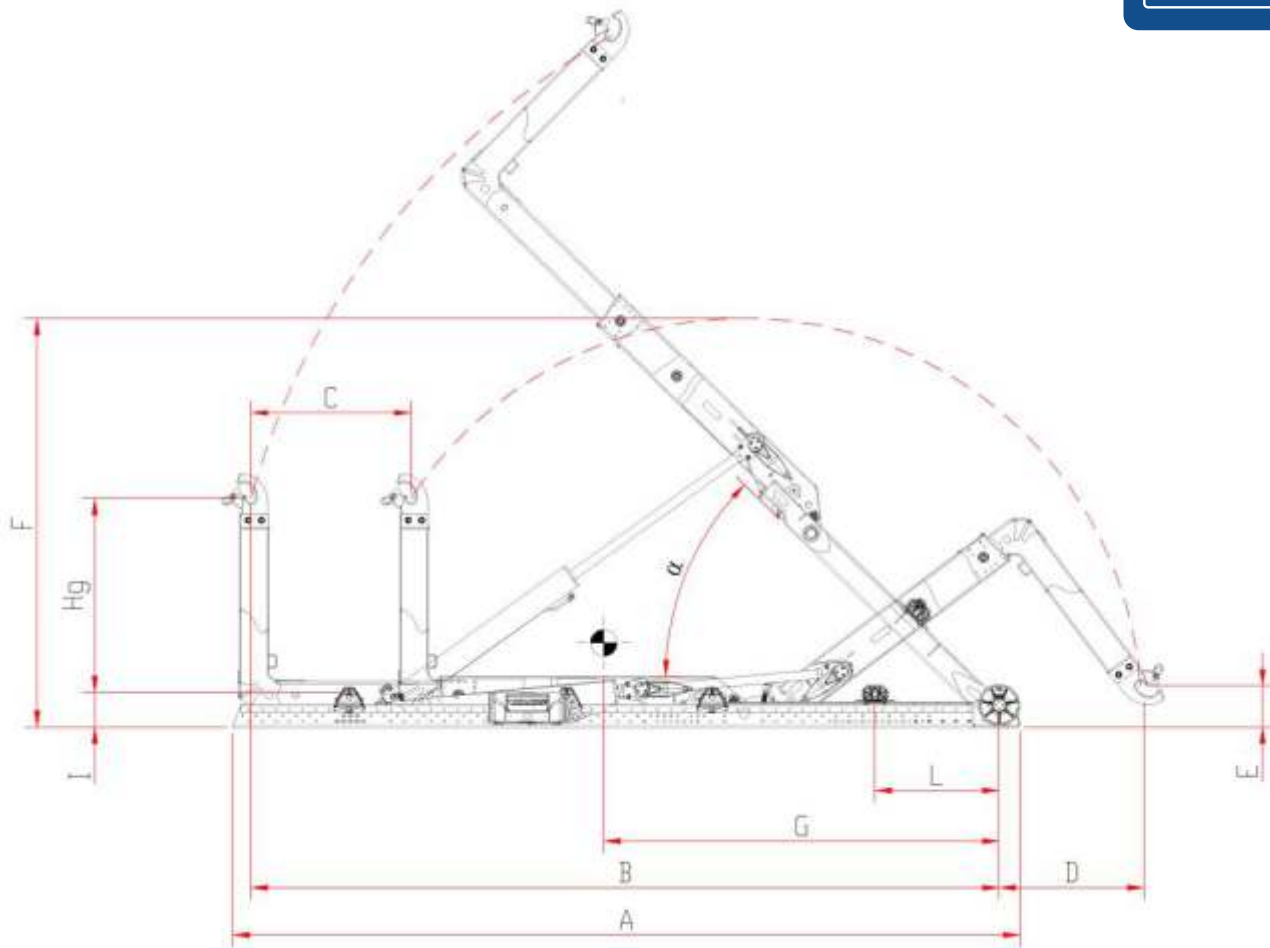


MODEL	T 57.000 XC MS	T 57.000 C MS	T 57.000 NC MS	T 57.000 N MS	T 57.000 NL MS	T 57.000 L MS	T 57.000 XL MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	191,33" (4.860 mm)	199,21" (5.060mm)	207,08" (5.260 mm)	214,96" (5.460 mm)	222,83" (5.660 mm)	230,70" (5.860mm)	238,58" (6.060 mm)
B	181,1" (4.600 mm)	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)	228,34" (5.800 mm)
C	31,49" (800 mm)	39,37" (1000 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)
D	66,92" (1.700 mm)	66,92" (1.700 mm)	66,92" (1.700 mm)	59,05" (1.500 mm)	51,18" (1.300 mm)	43,3" (1100 mm)	35,43" (1.480 mm)
E	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)
F	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070mm)	120,86" (3.070 mm)
G	98,42" (2.500 mm)	100,39" (2.550 mm)	102,36" (2.600 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050mm)	124,01" (3.150 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	10,62" (450 mm)	14,56" (450 mm)	22,44" (450 mm)	21,65" (550 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.555 lb (2.520 Kg)	5.621 lb (2.550 Kg)	5.687 lb (2.580 Kg)	5.732 lb (2.600 Kg)
α	55°	55°	55°	52°	49°	46°	43°
Container min. max.	12' - 13' (3.657-3.962 mm)	12' - 14' (3.657-4.267 mm)	13' - 15' (3.962-4.572 mm)	13' - 16' (3.962-4.876 mm)	14' - 16' (4.267-4.876 mm)	14' - 17' (4.267-5.181 mm)	14' - 17' (4.267-5.181 mm)
LIFTING CAPACITY	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)
TIPPING CAPACITY	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)	57.000 lb (25.910 Kg)



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL

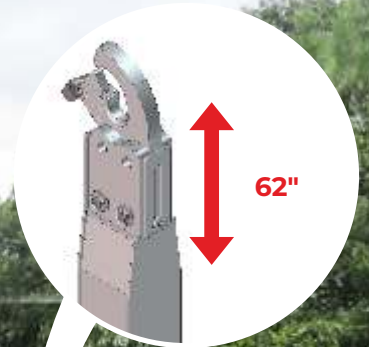


BOLTED INTERCHANGEABLE
CONTAINER SUPPORT




BOBEASY
CAB CONTROL



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

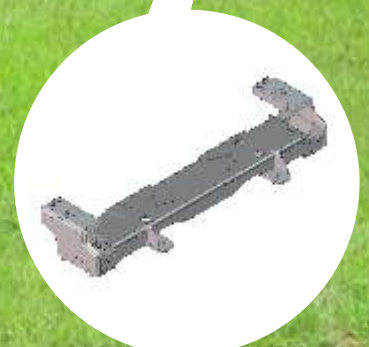

EXTERNAL MECHANICAL
LOCKING

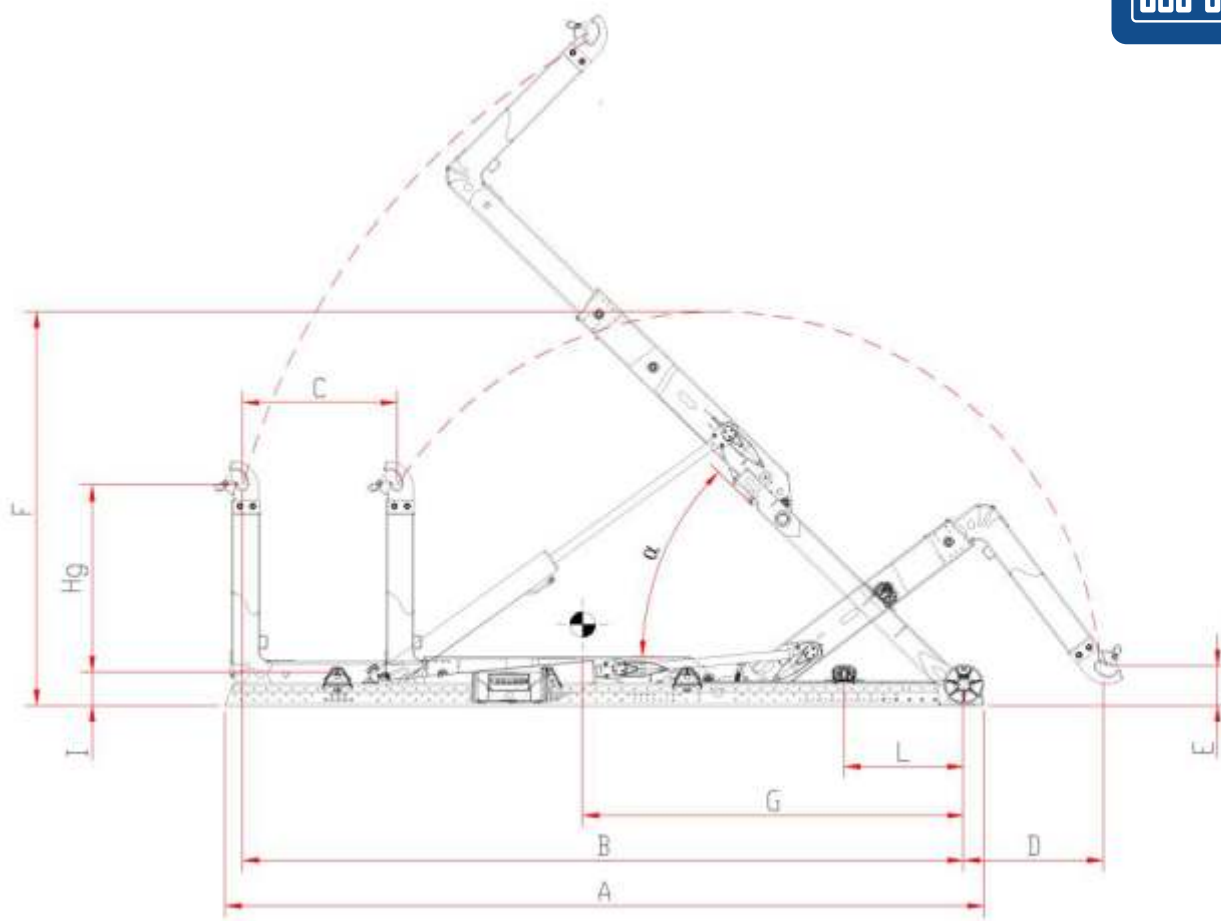

MODEL	T 60.000 XC MS	T 60.000 C MS	T 60.000 NC MS	T 60.000 N MS	T 60.000 NL MS	T 60.000 L MS	T 60.000 XL MS
Hg	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)
A	191,33" (4.860 mm)	199,21" (5.060mm)	207,08" (5.260 mm)	214,96" (5.460 mm)	222,83" (5.660 mm)	230,70" (5.860mm)	238,58" (6.060 mm)
B	181,1" (4.600 mm)	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)	228,34" (5.800 mm)
C	31,49" (800 mm)	39,37" (1000 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)
D	66,92" (1.700 mm)	66,92" (1.700 mm)	66,92" (1.700 mm)	59,05" (1.500 mm)	51,18" (1.300 mm)	43,3" (1.100 mm)	35,43" (1.480 mm)
E	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)
F	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070mm)	120,86" (3.070 mm)
G	98,42" (2.500 mm)	100,39" (2.550 mm)	102,36" (2.600 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050mm)	124,01" (3.150 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	10,62" (450 mm)	14,56" (450 mm)	22,44" (450 mm)	21,65" (550 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.555 lb (2.520 Kg)	5.621 lb (2.550 Kg)	5.687 lb (2.580 Kg)	5.732 lb (2.600 Kg)
α	55°	55°	55°	52°	49°	46°	43°
Container min. max.	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height


BOBEASY
CAB CONTROL




BOLTED INTERCHANGEABLE
CONTAINER SUPPORT



HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL

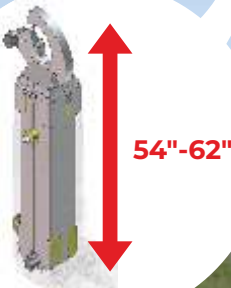


EXTERNAL MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



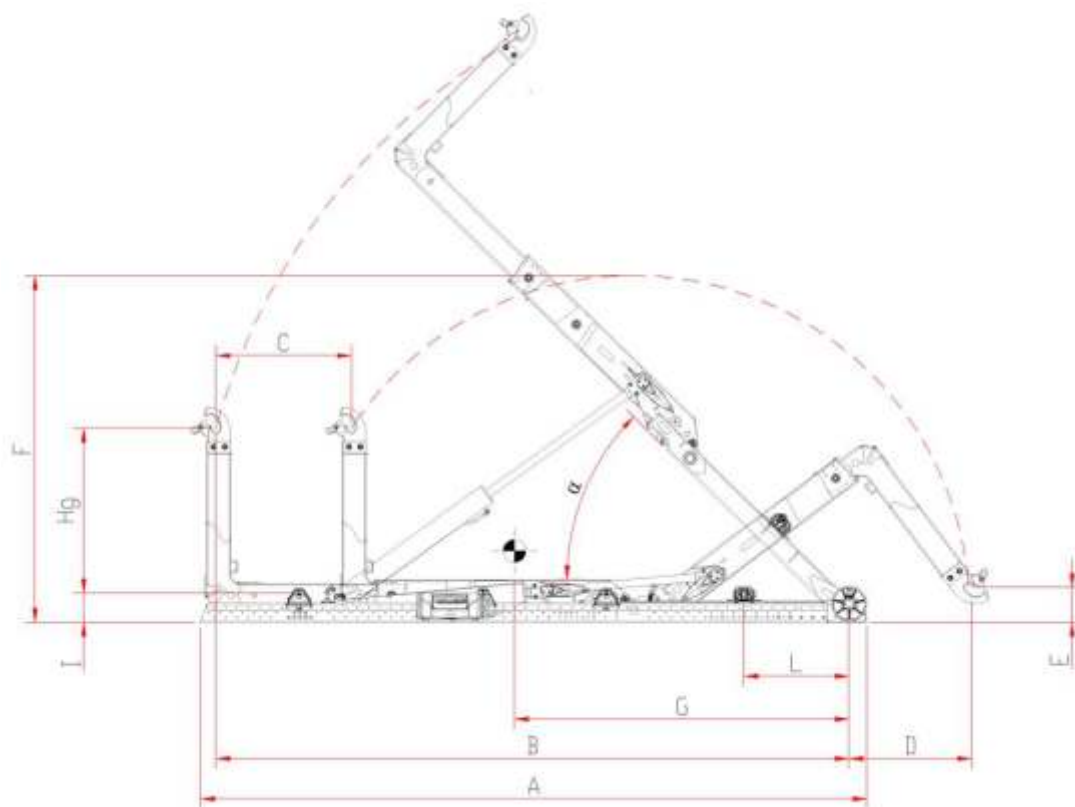

	STANDARD LENGHT					SPECIAL LENGHT	
MODEL	T 65.000 XC MS	T 65.000 C MS	T 65.000 NC MS	T 65.000 N MS	T 65.000 NL MS	T 65.000 L MS	T 65.000 XL MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	191,33" (4.860 mm)	199,21" (5.060mm)	207,08" (5.260 mm)	214,96" (5.460 mm)	222,83" (5.660 mm)	230,70" (5.860mm)	238,58" (6.060 mm)
B	181,1" (4.600 mm)	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)	228,34" (5.800 mm)
C	31,49" (800 mm)	39,37" (1000 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)
D	66,92" (1.700 mm)	66,92" (1.700 mm)	66,92" (1.700 mm)	59,05" (1.500 mm)	51,18" (1.300 mm)	43,3" (1100 mm)	35,43" (900 mm)
E	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)
F	120,86" (3.070 mm)	120,86" (3.070 mm))	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070mm)	120,86" (3.070 mm)
G	98,42" (2.500 mm)	100,39" (2.550 mm)	102,36" (2.600 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050mm)	124,01" (3.150 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	10,62" (450 mm)	14,56" (450 mm)	22,44" (450 mm)	21,65" (550 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.555 lb (2.520 Kg)	5.621 lb (2.550 Kg)	5.687 lb (2.580 Kg)	5.732 lb (2.600 Kg)
α	55°	55	55	52°	49°	46°	43°
Container min. max.	12' – 13' (3.657–3.962 mm)	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)
TIPPING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

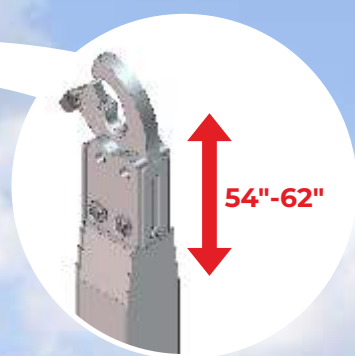

UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




BOBEASY
CAB CONTROL



EXTERNAL MECHANICAL
LOCKING



TILTING REAR
ROLLERS

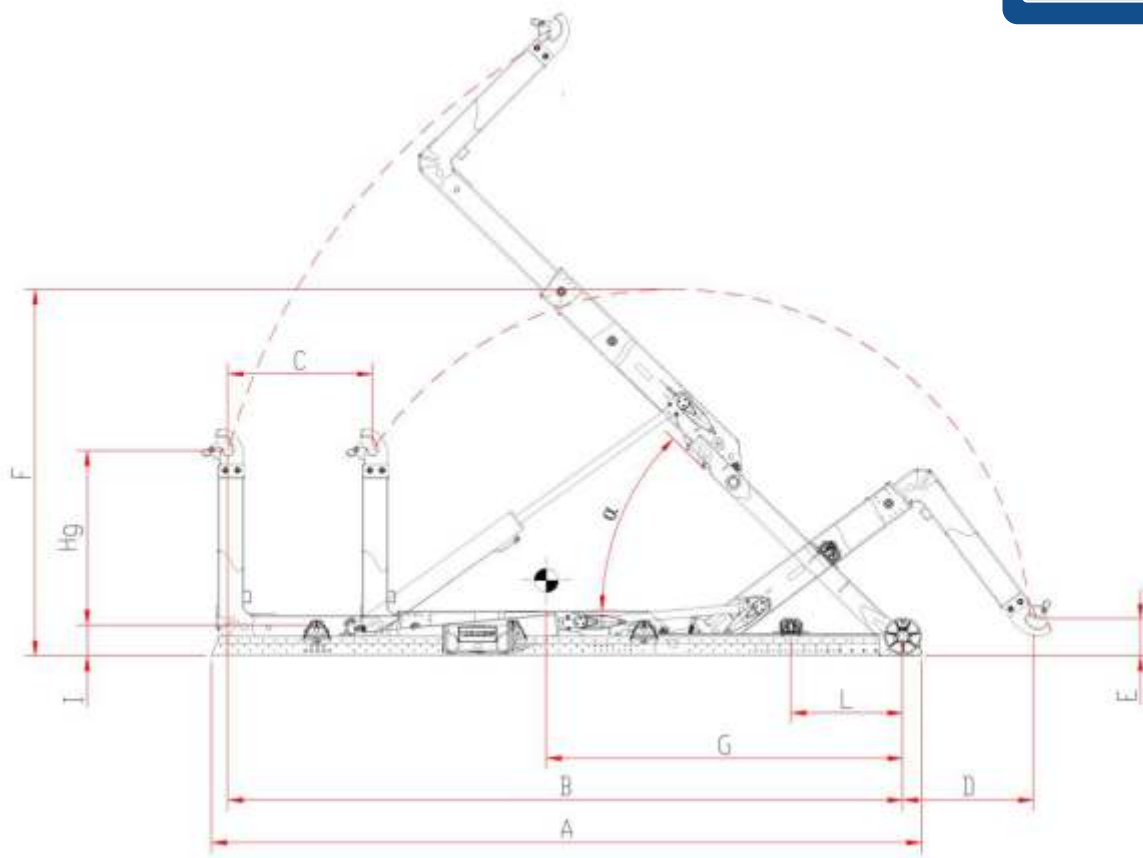

MODEL	TL 50.000 C MS	TL 50.000 NC MS	TL 50.000 N MS	TL 50.000 NL MS	TL 50.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33" (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)
D	66,92" (1.480 mm)	66,92" (1.280 mm)	59,05" (1.080 mm)	51,18" (880 mm)	43,3" (680 mm)
E	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)
F	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)
G	124,01" (3.150 mm)	129,92" (3.300 mm)	135,82" (3.450 mm)	141,73" (3.600 mm)	145,66" (3.700 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	14,56" (700 mm)	22,44" (900 mm)	21,65" (1100 mm)	27,55" (1300 mm)	35,43" (1500 mm)
Weight*	6.106 lb (2.770 Kg)	6.150 lb (2.790 Kg)	6.217 lb (2.820 Kg)	6.261 lb (2.840 Kg)	6.349 lb (2.880 Kg)
α	54°	51°	48°	46°	44°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679Kg)	50.000 lb (22.679Kg)	50.000 lb (22.679Kg)	50.000 lb (22.679Kg)
TIPPING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)


BOBEASY
CAB CONTROL



BOLTED INTERCHANGEABLE
CONTAINER SUPPORT




HOOK WITH MECHANIC
ADJUSTABLE LEVEL

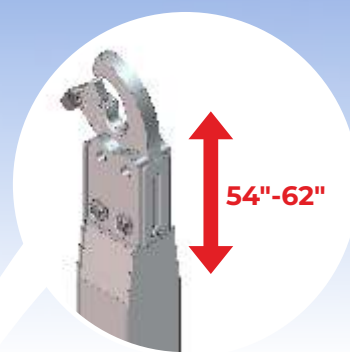


SOFT TOUCH
INTERLOCK



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

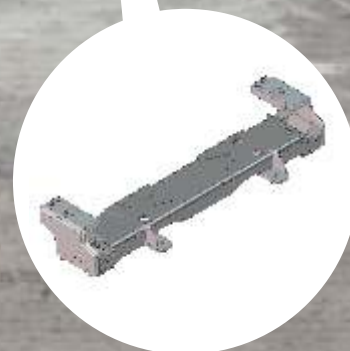


EXTERNAL MECHANICAL
LOCKING

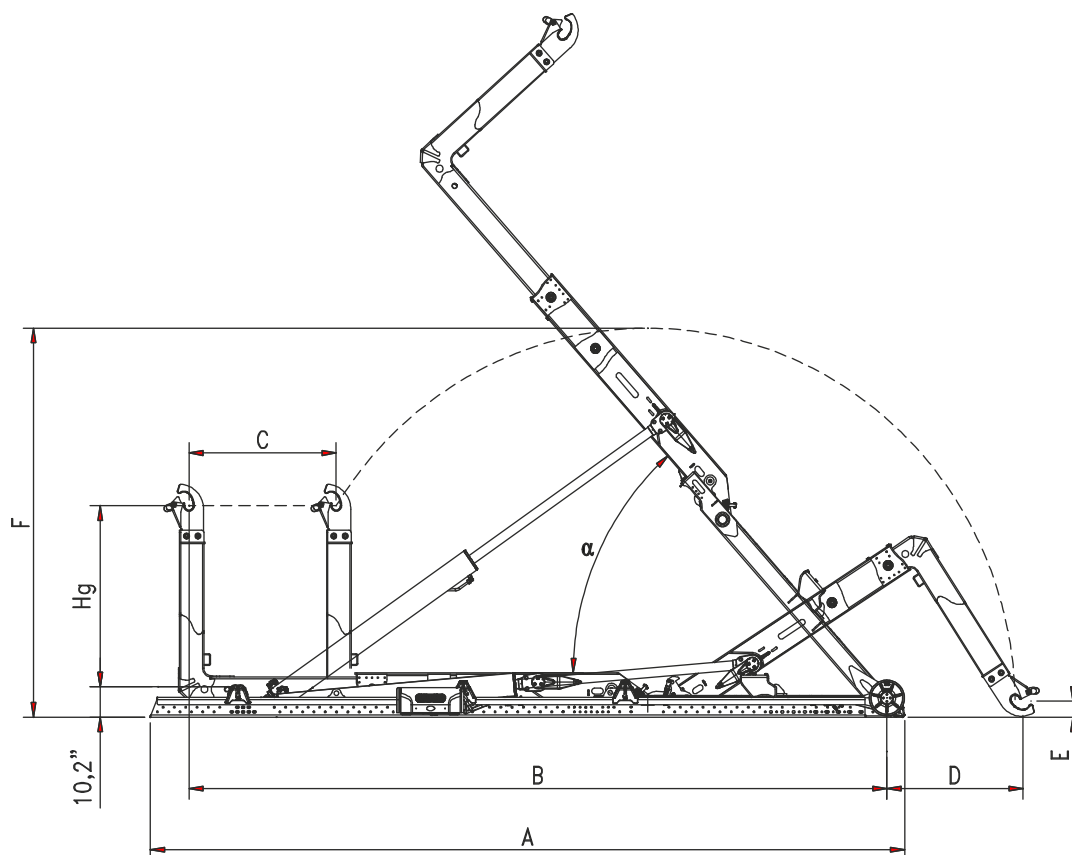

MODEL	TL 57.000 C	TL 57.000 NC	TL 57.000 N	TL 57.000 NL	TL 57.000 L
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	246,45" (6.260 mm)	254,33" (6.460 mm)	262,2" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	51,18" (1.300 mm)				
D	62,99" (1.600 mm)	55,11" (1.400 mm)	42,24" (1.200 mm)	39,37" (1.000 mm)	31,49" (800 mm)
E	5,5" (140 mm)				
F	131,69" (3.345 mm)				
Weight*	6.070 lb (2.760 Kg)	6.140 lb (2.790 Kg)	6.200 lb (2.820 Kg)	6.270 lb (2.850 Kg)	6.340 lb (2.880 Kg)
α	54°	51°	48°	46°	44°
Container min. max.	16' – 21' (4.880 – 6.400 mm)	16' – 22' (4.880 – 6.700 mm)	17' – 22' (5.180 – 6.700 mm)	18' – 23' (5.480 – 7.000 mm)	18' – 24' (5.480 – 7.310 mm)
LIFTING CAPACITY	57.000 lb (25.910 Kg)				
TIPPING CAPACITY	57.000 lb (25.910 Kg)				


HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL




HOOK WITH MECHANIC
ADJUSTABLE LEVEL



SOFT TOUCH
INTERLOCK



EXTERNAL MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



BOLTED INTERCHANGEABLE
CONTAINER SUPPORT




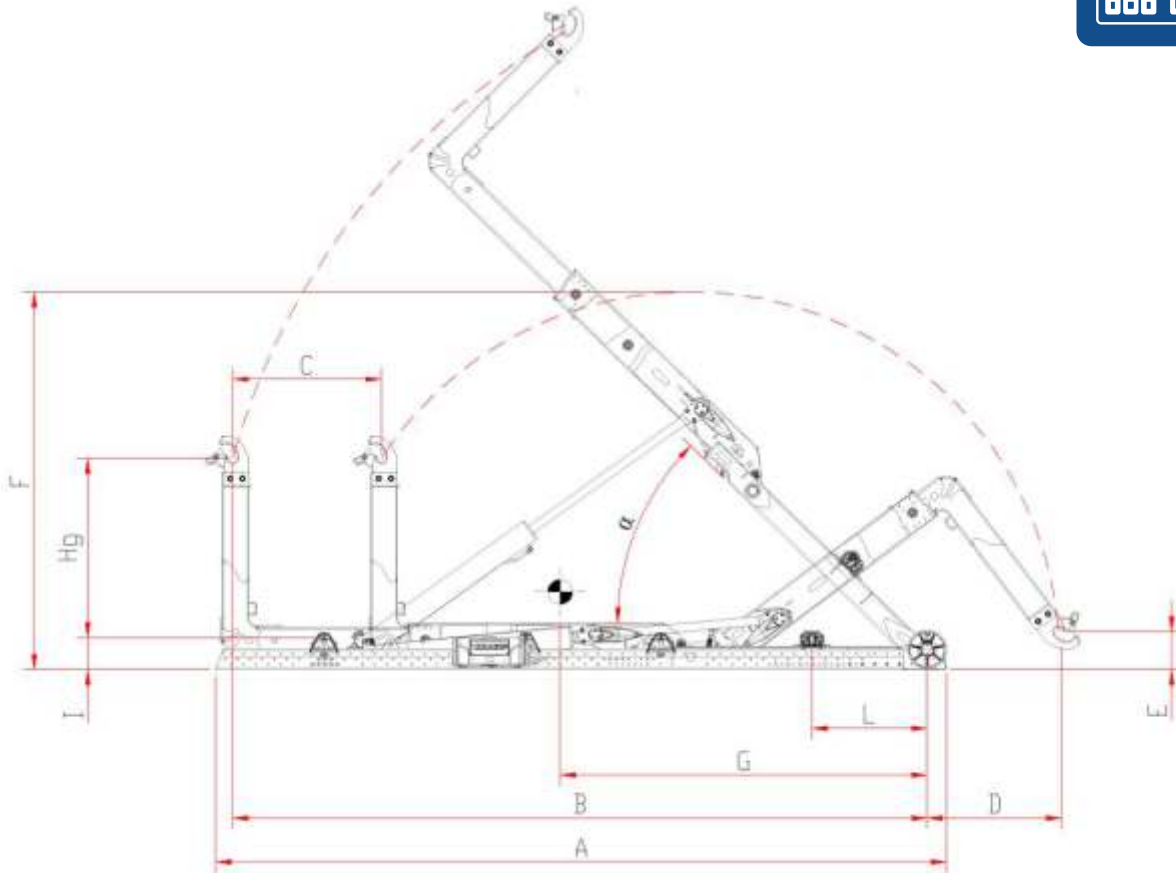

MODEL	TL 60.000 C MS	TL 60.000 NC MS	TL 60.000 N MS	TL 60.000 NL MS	TL 60.000 L MS
Hg	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)	61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33" (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)
D	66,92" (1.480 mm)	66,92" (1.280 mm)	59,05" (1.080 mm)	51,18" (880 mm)	43,3" (680 mm)
E	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)
F	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)
G	124,01" (3.150 mm)	129,92" (3.300 mm)	135,82" (3.450 mm)	141,73" (3.600 mm)	145,66" (3.700 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	14,56" (700 mm)	22,44" (900 mm)	21,65" (1100 mm)	27,55" (1300 mm)	35,43" (1500 mm)
Weight*	6.106 lb (2.770 Kg)	6.150 lb (2.790 Kg)	6.217 lb (2.820 Kg)	6.261 lb (2.840 Kg)	6.349 lb (2.880 Kg)
α	54°	51°	48°	46°	44°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height

HOOK WITH MECHANIC
ADJUSTABLE LEVEL




BOLTED INTERCHANGEABLE
CONTAINER SUPPORT



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL



EXTERNAL MECHANICAL
LOCKING

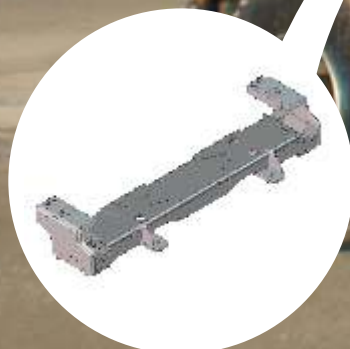


UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




BOBEASY
CAB CONTROL



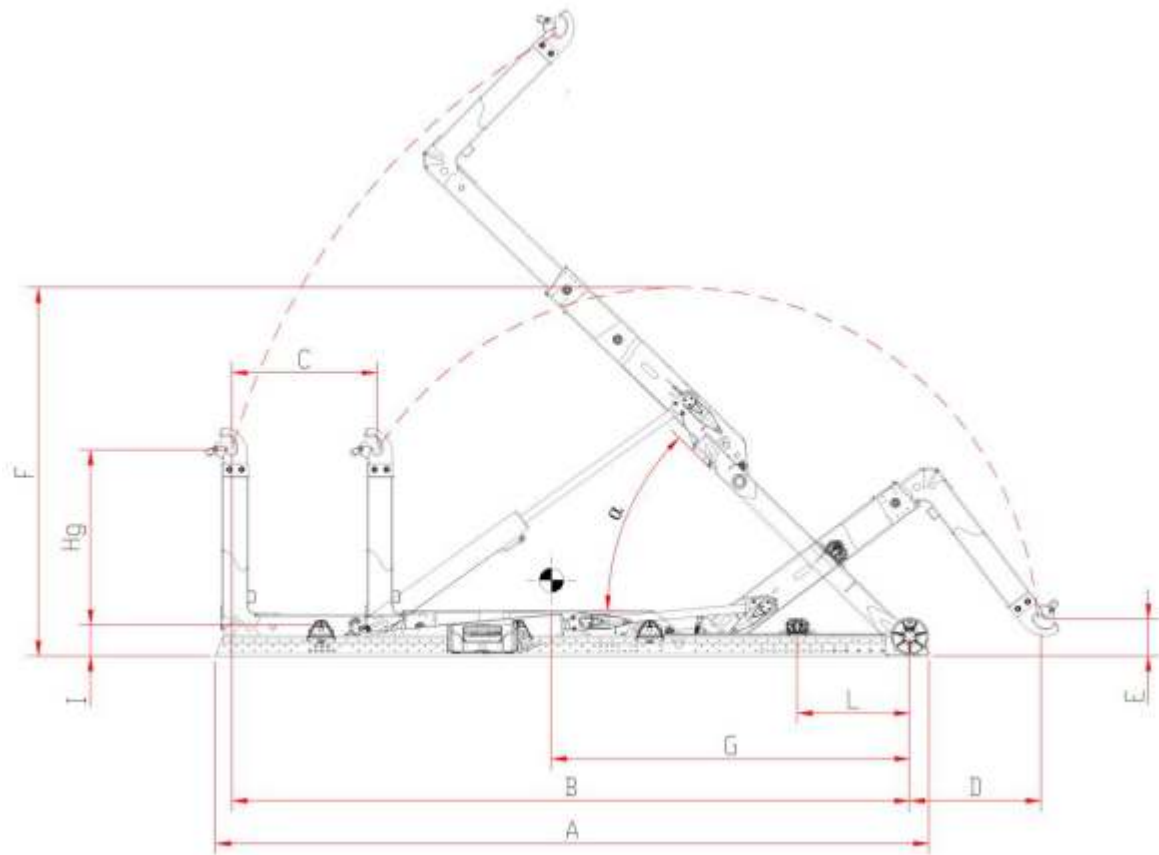


MODEL	TL 65.000 C MS	TL 65.000 NC MS	TL 65.000 N MS	TL 65.000 NL MS	TL 65.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33" (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)
D	66,92" (1.480 mm)	66,92" (1.280 mm)	59,05" (1.080 mm)	51,18" (880 mm)	43,3" (680 mm)
E	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)
F	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)
G	124,01" (3.150 mm)	129,92" (3.300 mm)	135,82" (3.450 mm)	141,73" (3.600 mm)	145,66" (3.700 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	14,56" (700 mm)	22,44" (900 mm)	21,65" (1100 mm)	27,55" (1300 mm)	35,43" (1500 mm)
Weight*	6.106 lb (2.770 Kg)	6.150 lb (2.790 Kg)	6.217 lb (2.820 Kg)	6.261 lb (2.840 Kg)	6.349 lb (2.880 Kg)
α	54°	51°	48°	46°	44°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)
TIPPING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)

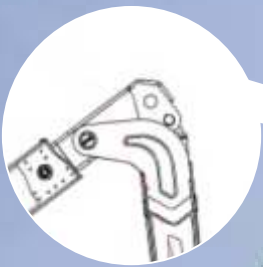

ARTICULATED
ARM

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



54"-62"

SOFT TOUCH
INTERLOCK



REAR
ROLLERS




BOBEASY
CAB CONTROL



EXTERNAL HYDRAULIC
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

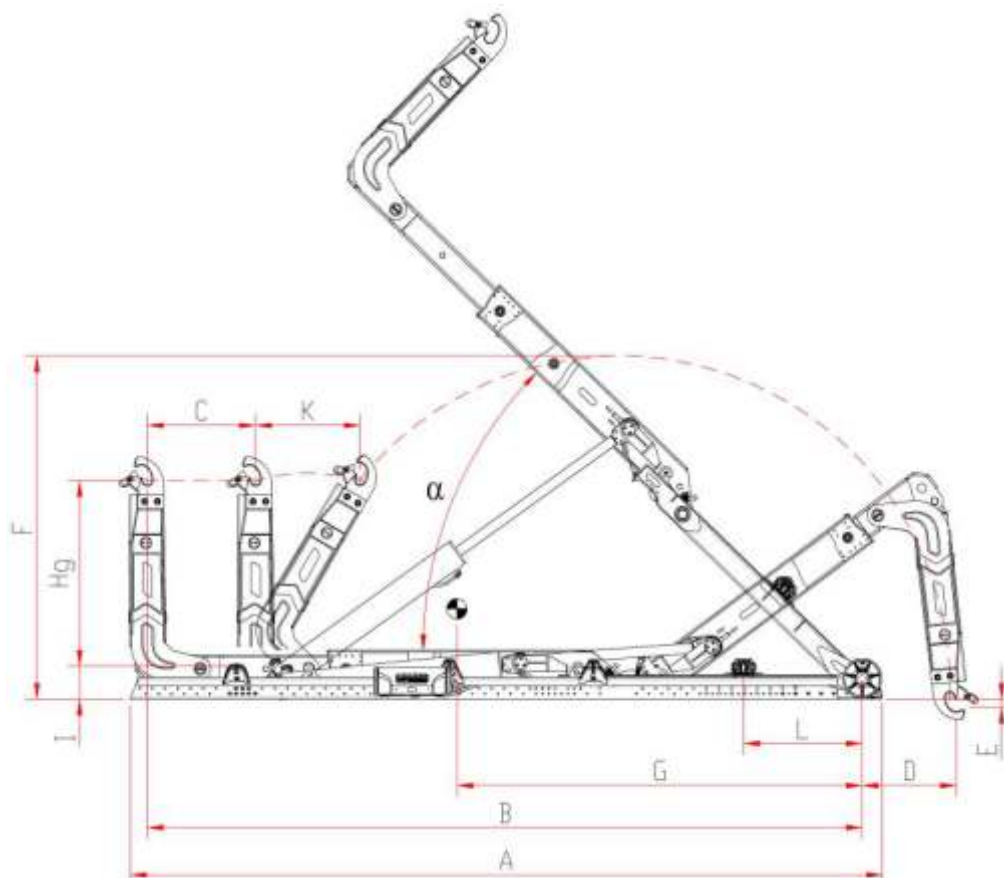

MODEL	TA 50.000 C MS	TA 50.000 NC MS	TA 50.000 N MS	TA 50.000 NL MS	TA 50.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	200,78" (5.100mm)	208,66" (5.300 mm)	216,53" (5.500 mm)	224,40" (5.700 mm)	232,28" (5.900 mm)
B	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)
C	25,59" (650 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
D	48,81" (1.240mm)	48,81" (1.240 mm)	40,94" (1.040 mm)	37" (940 mm)	29,13" (740 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	106,32" (2.700 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050 mm)	125,98" (3.200 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (400 mm)	15,74" (400 mm)	23,62" (600 mm)	27,55" (700 mm)	35,43" (900 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.018 lb (2.730 Kg)	6.018 lb (2.730 Kg)	6.062 lb (2.750 Kg)	6.150 lb (2.790Kg)	6.194 lb (2.810 Kg)
α	58°	54°	51°	48°	45°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)
TIPPING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

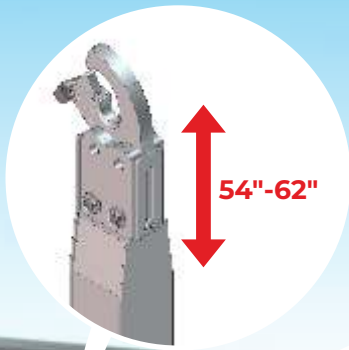

ARTICULATED ARM



BOBEASY
CAB CONTROL



REAR
ROLLERS




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



EXTERNAL HYDRAULIC
LOCKING



SOFT TOUCH
INTERLOCK

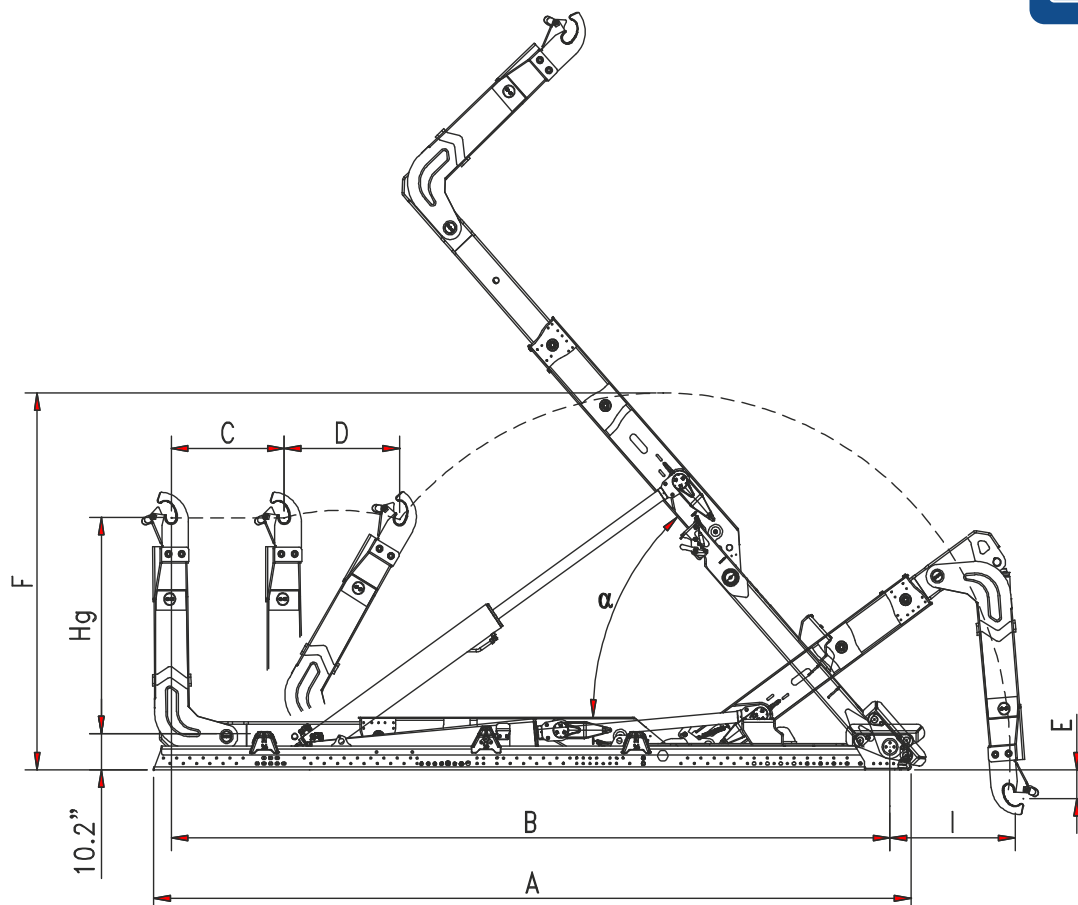

	SPECIAL LENGHT	STANDARD LENGHT			SPECIAL LENGHT
MODEL	TA 57.000 C	TA 57.000 NC	TA 57.000 N	TA 57.000 NL	TA 57.000 L
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	200,78" (5.100 mm)	208,66" (5.300 mm)	216,53" (5.500 mm)	224,4" (5.700 mm)	232,28" (5.900 mm)
B	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)
C	25,59" (650 mm)	33,46" (850 mm)			
D	33,46" (850 mm)				
E	7,87" (200 mm)				
F	106,29" (2.700 mm)				
I	52,75" (1.340 mm)	52,75" (1.340 mm)	44,88" (1.140 mm)	37" (940 mm)	29,13" (740 mm)
Weight*	6.000 lb (2.730 Kg)		6.090 lb (2.770 Kg)	6.180 lb (2.810 Kg)	6.270 lb (2.850 Kg)
α	55°	55°	52°	49°	46°
Container min. max.	12' – 18' (3.660 – 5.480 mm)	12' – 19' (3.660 – 5.790 mm)	13' – 20' (3.960 – 6.100 mm)	14' – 20' (4.260 – 6.100 mm)	15' – 21' (4.570 – 6.400 mm)
LIFTING CAPACITY	57.000 lb (25.910 Kg)				
TIPPING CAPACITY	57.000 lb (25.910 Kg)				


REAR
ROLLERS



ARTICULATED ARM



HOOK WITH MECHANIC
ADJUSTABLE LEVEL



BOBEASY
CAB CONTROL



SOFT TOUCH
INTERLOCK




EXTERNAL HYDRAULIC
LOCKING



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




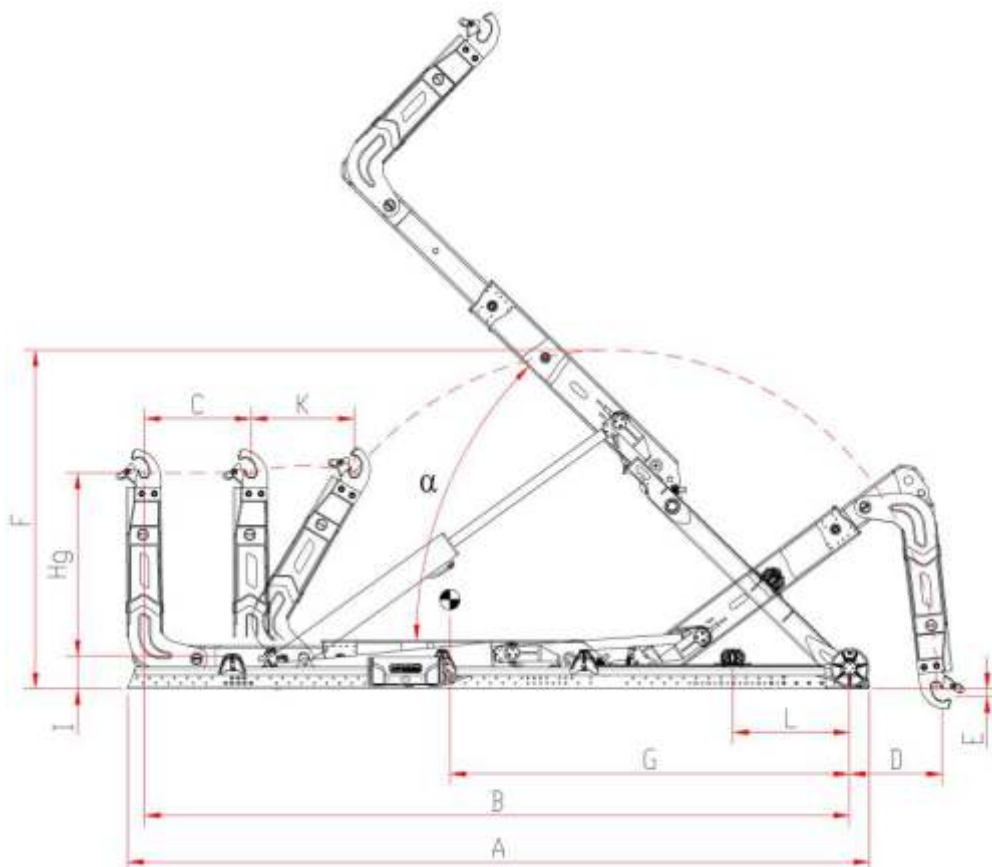

MODEL	TA 60.000 C MS	TA 60.000 NC MS	TA 60.000 N MS	TA 60.000 NL MS	TA 60.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	200,78" (5.100mm)	208,66" (5.300 mm)	216,53" (5.500 mm)	224,40" (5.700 mm)	232,28" (5.900 mm)
B	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)
C	25,59" (650 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
D	48,81" (1.240mm)	48,81" (1.240 mm)	40,94" (1.040 mm)	37" (940 mm)	29,13" (740 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	106,32" (2.700 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050 mm)	125,98" (3.200 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (400 mm)	15,74" (400 mm)	23,62" (600 mm)	27,55" (700 mm)	35,43" (900 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.018 lb (2.730 Kg)	6.018 lb (2.730 Kg)	6.062 lb (2.750 Kg)	6.150 lb (2.790Kg)	6.194 lb (2.810 Kg)
α	58°	54°	51°	48°	45°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)


*with hook level 62" only and according to chassis height



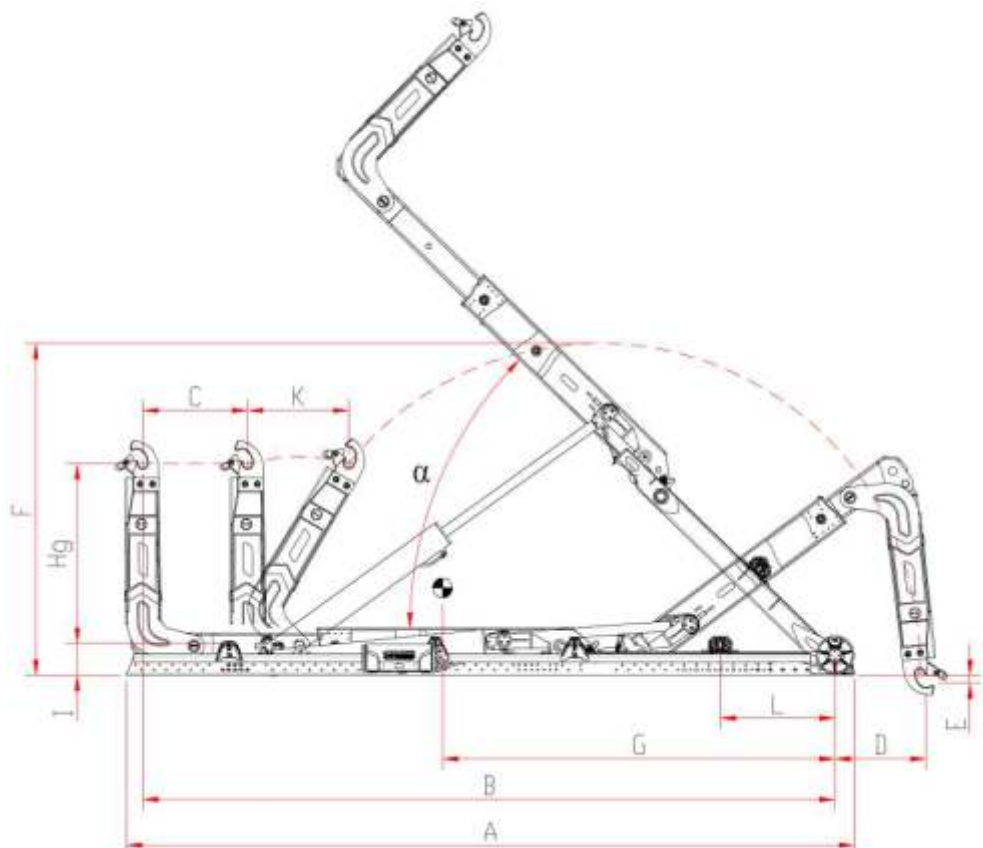


MODEL	TA 65.000 C MS	TA 65.000 NC MS	TA 65.000 N MS	TA 65.000 NL MS	TA 65.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	200,78" (5.100mm)	208,66" (5.300 mm)	216,53" (5.500 mm)	224,40" (5.700 mm)	232,28" (5.900 mm)
B	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)
C	25,59" (650 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
D	48,81" (1.240mm)	48,81" (1.240 mm)	40,94" (1.040 mm)	37" (940 mm)	29,13" (740 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	106,32" (2.700 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050 mm)	125,98" (3.200 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (400 mm)	15,74" (400 mm)	23,62" (600 mm)	27,55" (700 mm)	35,43" (900 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.018 lb (2.730 Kg)	6.018 lb (2.730 Kg)	6.062 lb (2.750 Kg)	6.150 lb (2.790Kg)	6.194 lb (2.810 Kg)
α	58°	54°	51°	48°	45°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)
TIPPING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

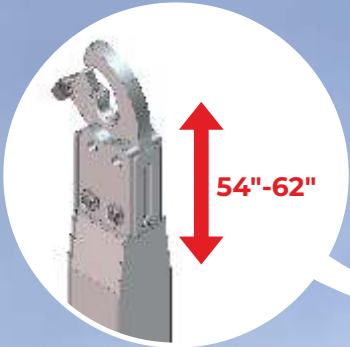

ARTICULATED
ARM

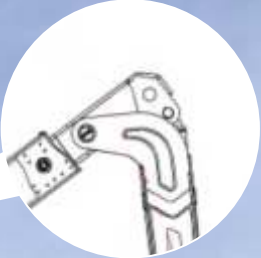

BOBEASY
CAB CONTROL



REAR
ROLLERS



FRONT CONTAINER
SUPPORT




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




TILTING REAR
ROLLERS




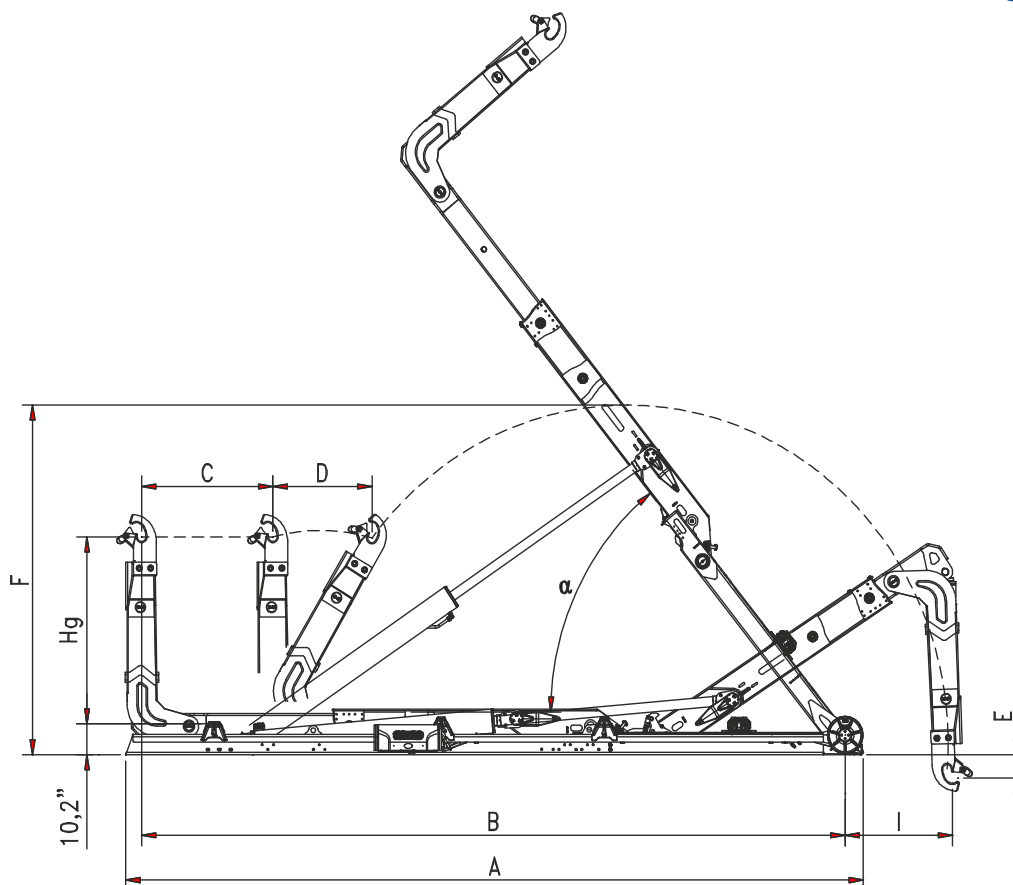


MODEL	TAL 57.000 C	TAL 57.000 NC	TAL 57.000 N	TAL 57.000 NL	TAL 57.000 L
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	238,58" (6.060 mm)	246,45" (6.260 mm)	254,33" (6.460 mm)	262,2" (6.660 mm)	269,68" (6.850 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1.150 mm)				
D	33,46" (850 mm)				
E	7,87" (200 mm)				
F	114,56" (2.910 mm)				
I	52,75" (1.340 mm)	44,88" (1.140 mm)	37" (940 mm)	29,13" (740 mm)	21,26" (540 mm)
Weight*	6.550 lb (2.980 Kg)	6.620 lb (3.010 Kg)	6.690 lb (3.040 Kg)	6.750 lb (3.070 Kg)	6.820 lb (3.100 Kg)
α	57°	54°	51°	48°	46°
Container min. max.	15' – 21' (4.570 – 6.400 mm)	15' – 22' (4.570 – 6.700 mm)	16' – 22' (4.880 – 6.700 mm)	16' – 23' (4.880 – 7.000 mm)	17' – 24' (5.180 – 7.310 mm)
LIFTING CAPACITY	57.000 lb (25.910 Kg)				
TIPPING CAPACITY	57.000 lb (25.910 Kg)				

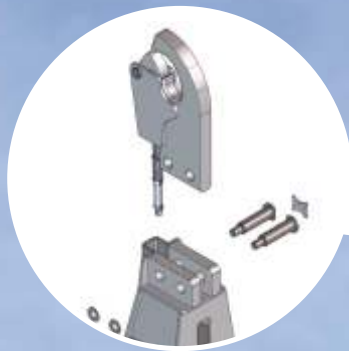

PNEUMATIC HOOK

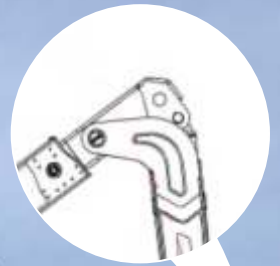

ARTICULATED ARM

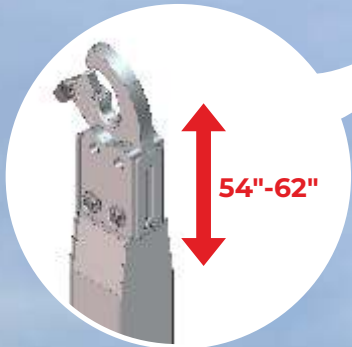

HOOK WITH MECHANIC
ADJUSTABLE LEVEL

FRONT CONTAINER
SUPPORT



BOBEASY
CAB CONTROL



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




REAR
ROLLERS



TILTING REAR
ROLLERS



TAL 57000

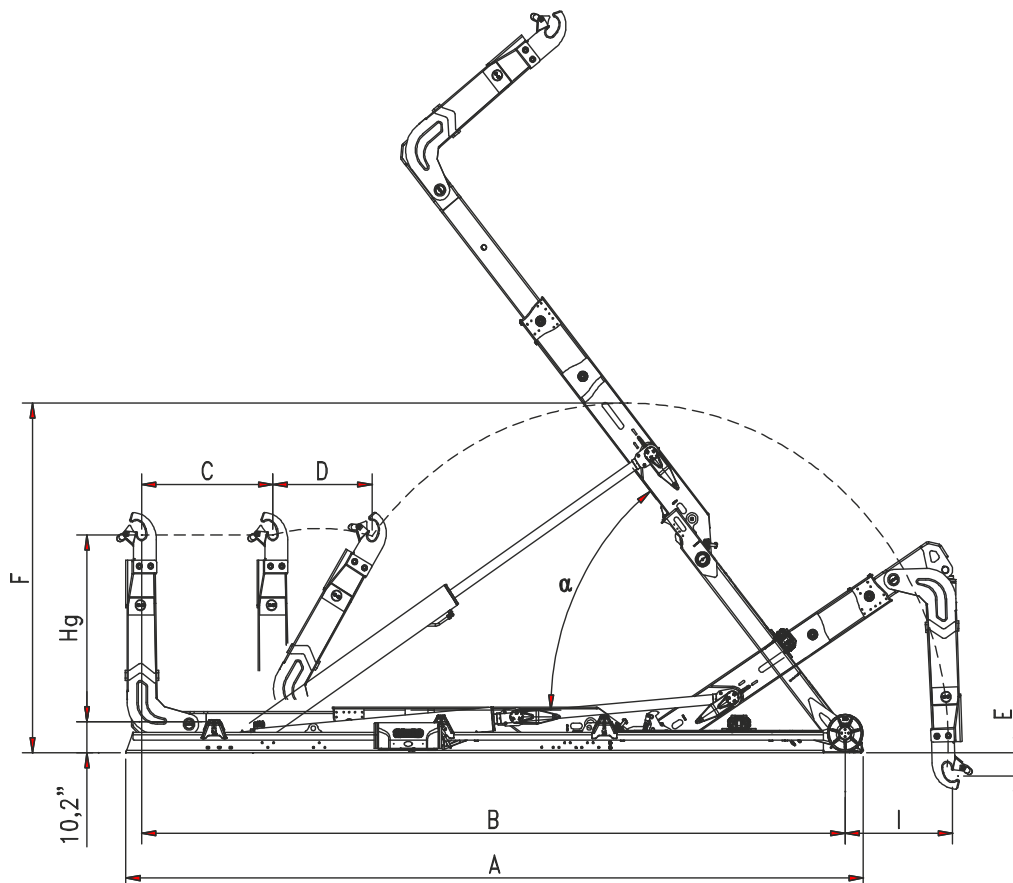

MODEL	TAL 57.000 C	TAL 57.000 NC	TAL 57.000 N	TAL 57.000 NL	TAL 57.000 L
Hg	53,88"/61,75" (1.369/1.569 mm)				
A	238,58" (6.060 mm)	246,45" (6.260 mm)	254,33" (6.460 mm)	262,2" (6.660 mm)	269,68" (6.850 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1.150 mm)				
D	33,46" (850 mm)				
E	7,87" (200 mm)				
F	114,56" (2.910 mm)				
I	52,75" (1.340 mm)	44,88" (1.140 mm)	37" (940 mm)	29,13" (740 mm)	21,26" (540 mm)
Weight*	6.550 lb (2.980 Kg)	6.620 lb (3.010 Kg)	6.690 lb (3.040 Kg)	6.750 lb (3.070 Kg)	6.820 lb (3.100 Kg)
α	57°	54°	51°	48°	46°
Container min. max.	15' - 21' (4.570 - 6.400 mm)	15' - 22' (4.570 - 6.700 mm)	16' - 22' (4.880 - 6.700 mm)	16' - 23' (4.880 - 7.000 mm)	17' - 24' (5.180 - 7.310 mm)
LIFTING CAPACITY	57.000 lb (25.910 Kg)				
TIPPING CAPACITY	57.000 lb (25.910 Kg)				


BOBEASY
CAB CONTROL



HOOK WITH MECHANIC
ADJUSTABLE LEVEL



PNEUMATIC HOOK



ARTICULATED ARM




TILTING REAR
ROLLERS



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




EXTERNAL HYDRAULIC
LOCKING

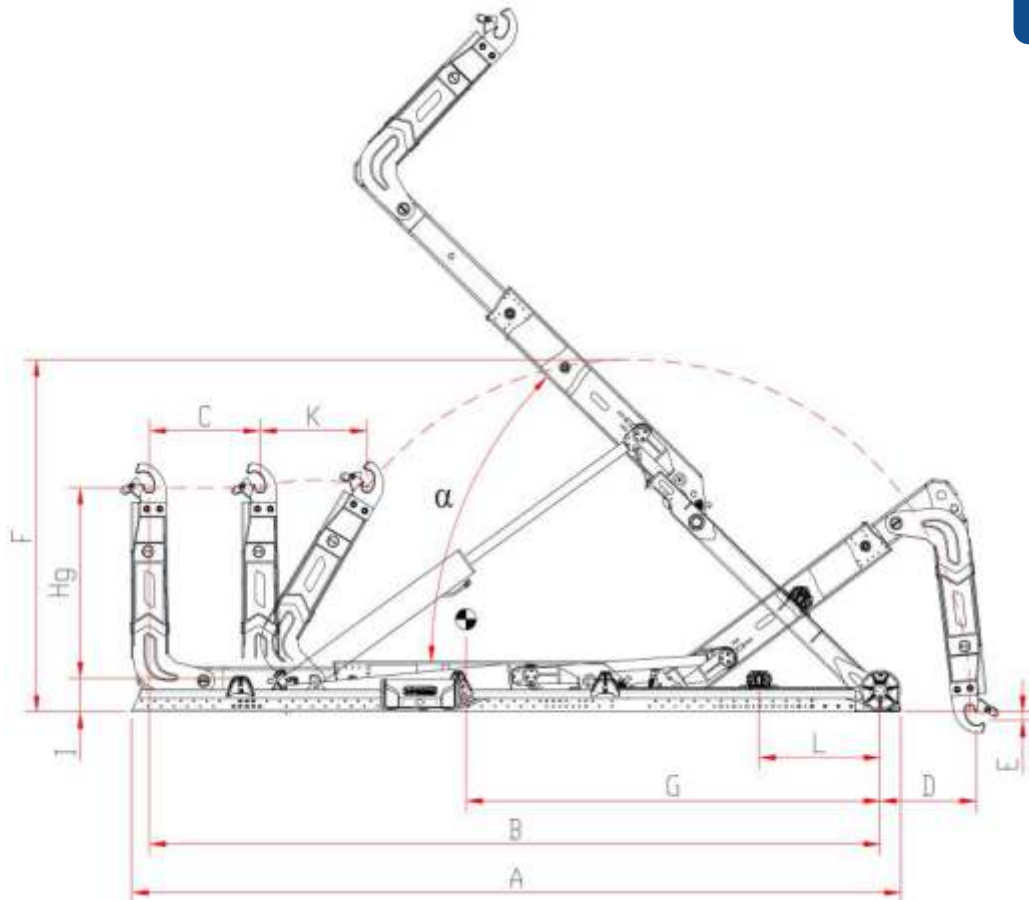

MODEL	TAL 60.000 C MS	TAL 60.000 NC MS	TAL 60.000 N MS	TAL 60.000 NL MS	TAL 60.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33 (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)
D	48,81" (1.250 mm)	48,81" (1.050 mm)	40,94" (850 mm)	37" (650 mm)	29,13" (450 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	1113,78" (2.890 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	125,98" (3.200 mm)	131,89" (3.350 mm)	137,79" (3.500 mm)	143,70" (3.650mm)	147,63" (3.750 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (500 mm)	15,74" (700 mm)	23,62" (900 mm)	27,55" (1.100 mm)	35,43" (1.300 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.591 lb (2.990 Kg)	6.657 lb (3.020 Kg)	6.724 lb (3.050 Kg)	6.768 lb (3.070 Kg)	6.834 lb (3.100 Kg)
α	57°	53°	51°	48°	45°
Container min. max.	12' – 14' (3.657–4.267 mm)	13' – 15' (3.962–4.572 mm)	13' – 16' (3.962–4.876 mm)	14' – 16' (4.267–4.876 mm)	14' – 17' (4.267–5.181 mm)
LIFTING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY *	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height

HOOK WITH MECHANIC
ADJUSTABLE LEVEL



ARTICULATED ARM



EXTERNAL HYDRAULIC
LOCKING



TILTING REAR
ROLLERS




BOBEASY
CAB CONTROL



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



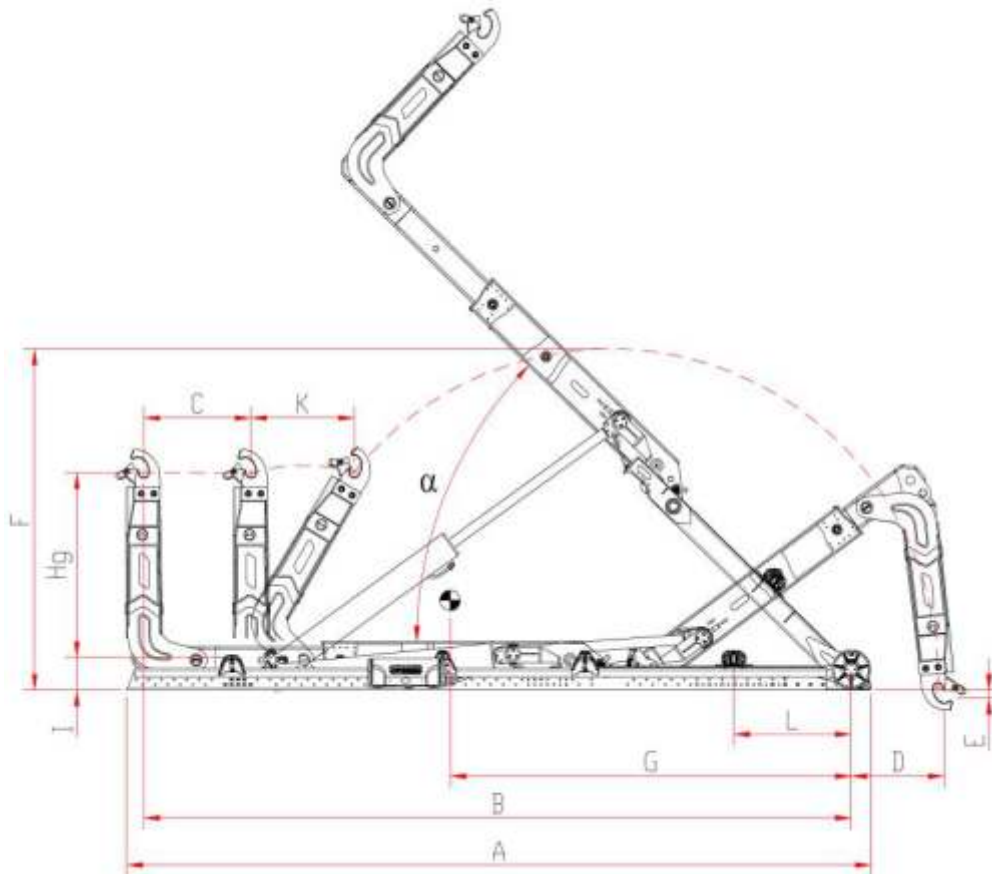

MODEL	TAL 65.000 C MS	TAL 65.000 NC MS	TAL 65.000 N MS	TAL 65.000 NL MS	TAL 65.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33 (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)	45,27" (1.150 mm)
D	48,81" (1.250 mm)	48,81" (1.050 mm)	40,94" (850 mm)	37" (650 mm)	29,13" (450 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	1113,78" (2.890 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	125,98" (3.200 mm)	131,89" (3.350 mm)	137,79" (3.500 mm)	143,70" (3.650mm)	147,63" (3.750 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (500 mm)	15,74" (700 mm)	23,62" (900 mm)	27,55" (1100 mm)	35,43" (1300 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.591 lb (2.990 Kg)	6.657 lb (3.020 Kg)	6.724 lb (3.050 Kg)	6.768 lb (3.070 Kg)	6.834 lb (3.100 Kg)
α	57°	53°	51°	48°	45°
Container min. max.	12' - 14' (3.657-4.267 mm)	13' - 15' (3.962-4.572 mm)	13' - 16' (3.962-4.876 mm)	14' - 16' (4.267-4.876 mm)	14' - 17' (4.267-5.181 mm)
LIFTING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)
TIPPING CAPACITY	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)	65000 lb (30000 Kg)



bob unilift





www.bobunilift.com



bob unilift



call us for information at
Ph. +1 276 252 9105



TIMBERLAND TRUCK SALES CORP.

218 Virgil H. Goode Highway
Bassett VA 24055 - Ph. +1 276 6294400
www.timberlandtrucks.com

BOB SISTEMI IDRAULICI SPA

Reg. Oltre Rea, 32 - 12060 Monchiero (CN) - Italy
Phone +39 0173 780 002 - Fax +39 0173 780 700
Email: info@bobspa.com