





HOOK WITH MECHANIC
ADJUSTABLE LEVEL



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL

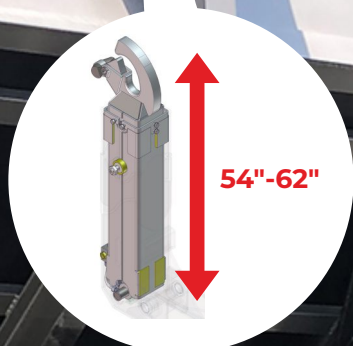

UNDERFRAME PIERCED
LONGITUDINAL MEMBERS




EXTERNAL MECHANICAL
LOCKING



BOBEASY
CAB CONTROL

BOBEASY
CAB CONTROL

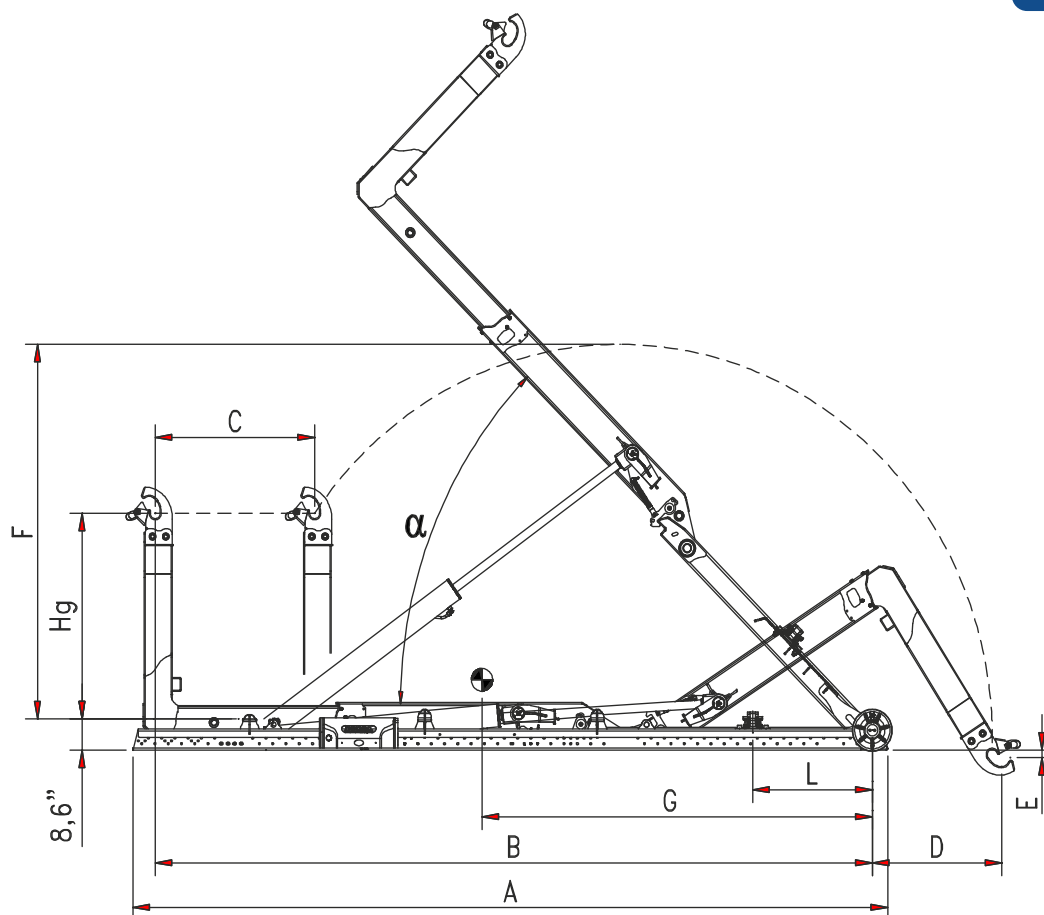

MODEL	T 31.000 XC MS	T 31.000 C MS	T 31.000 NC MS	T 31.000 N MS	T 31.000 NL MS	T 31.000 L MS
Hg	53,88"/61,75" (1.369/1.569 mm)					
A	200" (5.080 mm)			207,87" (5.280 mm)	215,74" (5.480 mm)	235,43" (5.680 mm)
B	173,22" (4.400 mm)	181,1" (4.600 mm)	204,72" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200mm)	220,47" (5.400mm)
C	31,49" (800 mm)	39,37" (1.000 mm)	40,74" (1.200 mm)			
D	62,2" (1.580 mm)			54,33" (1.380 mm)	46,45" (1.180 mm)	38,58" (980 mm)
E	3,93" (100 mm)					
F	113,38" (2.880 mm)					
G	96,06" (2.440 mm)	97,63" (2.480 mm)	98,81" (2.510 mm)	104,72" (2.660 mm)	110,23" (2.800 mm)	115,74" (2.940 mm)
L	19,64" (500 mm)			27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	3.700 lb (1.685Kg)			3.760 lb (1.710 Kg)	3.820 lb (1.735 Kg)	3.870 lb (1.760 Kg)
alpha	55°			51°	48°	45°
Container min. max.	14' – 17' (4.270–5.181 mm)		14' – 18' (4.267–5.486 mm)	14' – 19' (4.267–5.791 mm)	15' – 20' (4.572–6.096 mm)	16' – 21' (4.876–6.400 mm)
LIFTING CAPACITY	31.000 lb (14.090 Kg)					
TIPPING CAPACITY	31.000 lb (14.090 Kg)					