



HOOK WITH HYDRAULIC ADJUSTABLE LEVEL



HOOK WITH MECHANIC ADJUSTABLE LEVEL

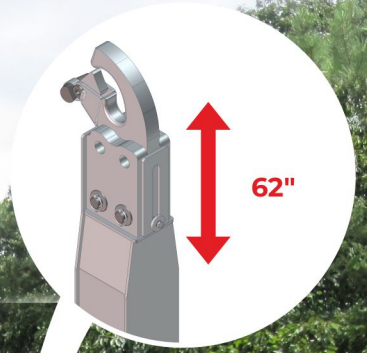

BOLTED INTERCHANGEABLE CONTAINER SUPPORT




BOBEASY CAB CONTROL



UNDERFRAME PIERCED LONGITUDINAL MEMBERS



EXTERNAL MECHANICAL LOCKING

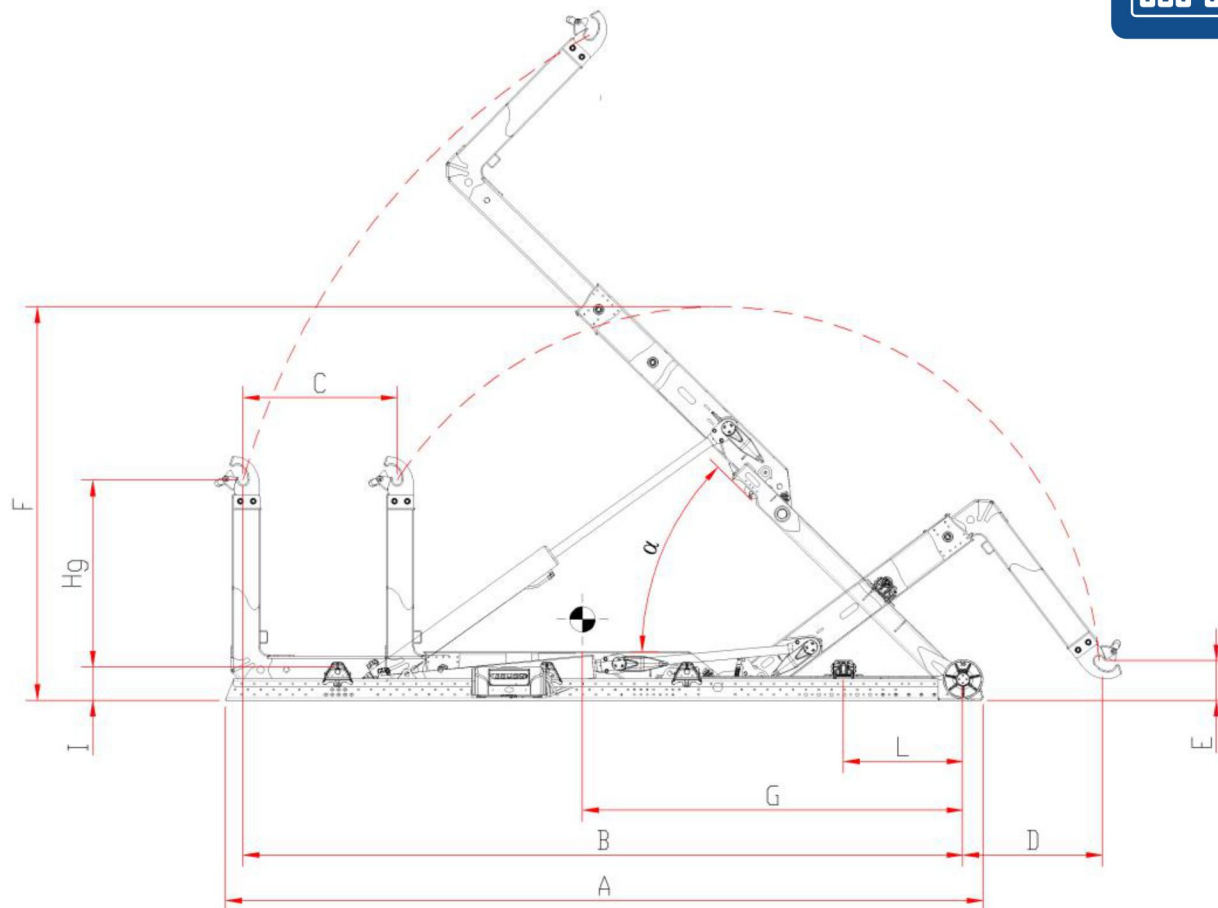

MODEL	T 60.000 XC MS	T 60.000 C MS	T 60.000 NC MS	T 60.000 N MS	T 60.000 NL MS	T 60.000 L MS	T 60.000 XL MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	207,08" (5.260 mm)	207,08" (5.260 mm)	207,08" (5.260 mm)	214,96" (5.460 mm)	222,83" (5.660 mm)	230,70" (5.860mm)	238,58" (6.060 mm)
B	181,1" (4.600 mm)	188,97" (4.800 mm)	196,85" (5.000 mm)	204,72" (5.200 mm)	212,59" (5.400 mm)	220,47" (5.600 mm)	228,34" (5.800 mm)
C	31,49" (800 mm)	39,37" (1000 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)	47,24" (1200 mm)
D	66,92" (1.700 mm)	66,92" (1.700 mm)	66,92" (1.700 mm)	59,05" (1.500 mm)	51,18" (1.300 mm)	43,3" (1100 mm)	35,43" (1.480 mm)
E	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)	5,9" (150 mm)
F	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070 mm)	120,86" (3.070mm)	120,86" (3.070 mm)
G	98,42" (2.500 mm)	100,39" (2.550 mm)	102,36" (2.600 mm)	108,26" (2.750 mm)	114,17" (2.900 mm)	120,07" (3.050mm)	124,01" (3.150 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	10,62" (450 mm)	14,56" (450 mm)	22,44" (450 mm)	21,65" (550 mm)	27,55" (700 mm)	35,43" (900 mm)	39,37" (1000 mm)
Weight*	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.489 lb (2.490 Kg)	5.555 lb (2.520 Kg)	5.621 lb (2.550 Kg)	5.687 lb (2.580 Kg)	5.732 lb (2.600 Kg)
α	55°	55°	55°	52°	49°	46°	43°
Container min. max.	14' - 17' (4.270 - 5.180 mm)	14' - 18' (4.270 - 5.480 mm)	14' - 19' (4.270 - 5.790 mm)	14' - 20' (4.270 - 6.100 mm)	15' - 20' (4.570 - 6.100 mm)	16' - 21' (4.870 - 6.400 mm)	16' - 22' (4.870 - 6.700 mm)
LIFTING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height