



HOOK WITH MECHANIC
ADJUSTABLE LEVEL




ARTICULATED
ARM

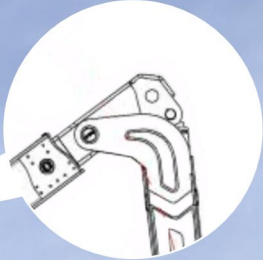


BOBEASY
CAB CONTROL



REAR
ROLLERS




FRONT CONTAINER
SUPPORT



TILTING REAR
ROLLERS

UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



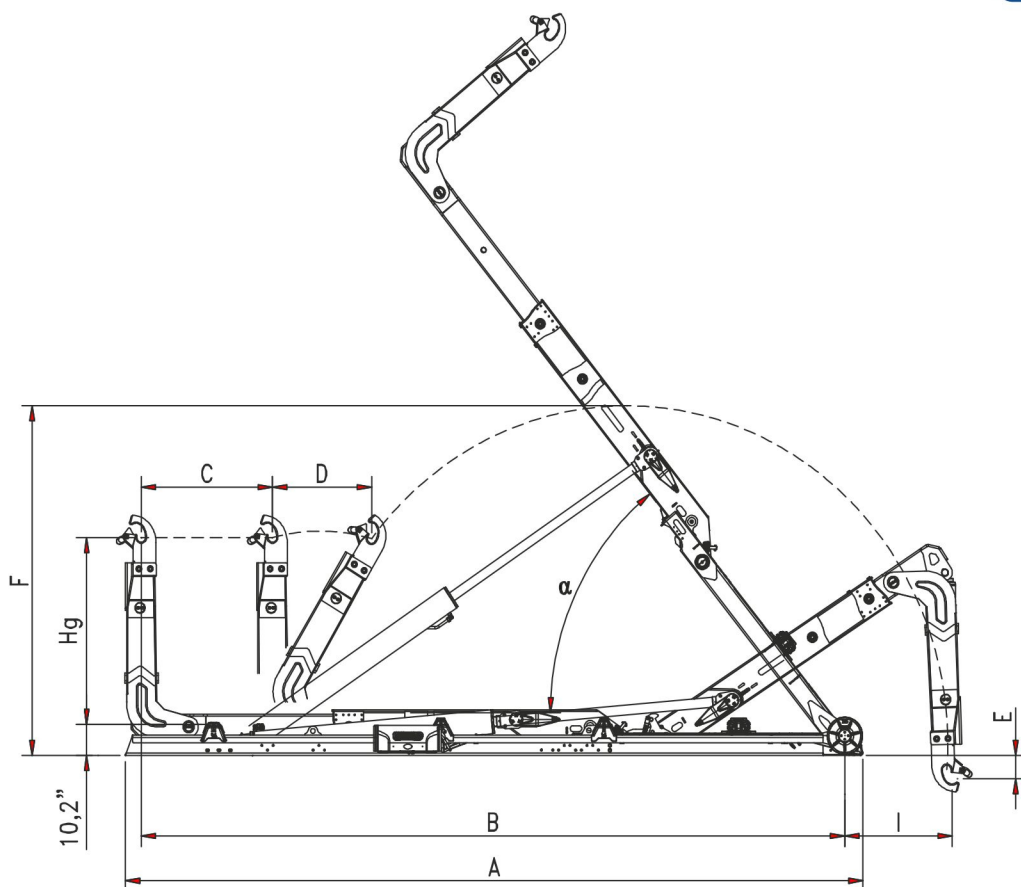

MODEL	TAL 50.000 C MS	TAL 50.000 NC MS	TAL 50.000 N MS	TAL 50.000 NL MS	TAL 50.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	238,58" (6.060 mm)	246,45" (6.260 mm)	254,33" (6.460 mm)	262,2" (6.660 mm)	269,68" (6.850 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)
D	48,81" (1.250 mm)	48,81" (1.050 mm)	40,94" (850 mm)	37" (650 mm)	29,13" (450 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	113,78" (2.890mm)	113,78" (2.890mm)	113,78" (2.890mm)	113,78" (2.890mm)	113,78" (2.890mm)
G	125,98" (3.200 mm)	131,89" (3.350 mm)	137,79" (3.500 mm)	143,70" (3.650mm)	147,63" (3.750 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (500 mm)	15,74" (700 mm)	23,62" (900 mm)	27,55" (1100 mm)	35,43" (1300 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.481 lb (2.940 Kg)	6.547 lb (2.970 Kg)	6.613 lb (3.000 Kg)	6.657 lb (3.020 Kg)	6.724 lb (3.050 Kg)
α	57°	53°	51°	48°	45°
Container min. max.	15' – 21' (4.570 – 6.400 mm)	15' – 22' (4.570 – 6.700 mm)	16' – 22' (4.880 – 6.700 mm)	16' – 23' (4.880 – 7.000 mm)	17' – 24' (5.180 – 7.310 mm)
LIFTING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)
TIPPING CAPACITY	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)	50.000 lb (22.679 Kg)