



BOBEASY
CAB CONTROL




HOOK WITH MECHANIC
ADJUSTABLE LEVEL



PNEUMATIC HOOK

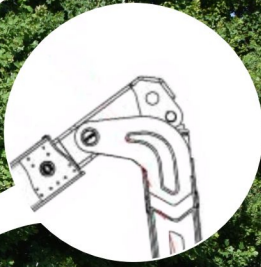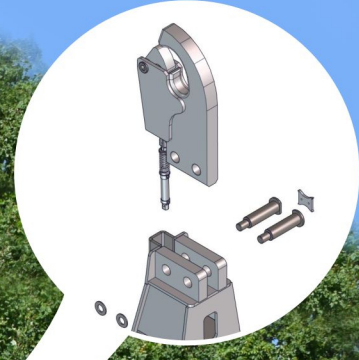


ARTICULATED ARM

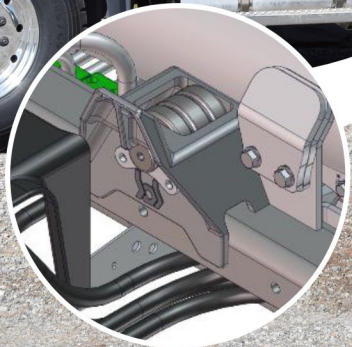


TILTING REAR
ROLLERS



UNDERFRAME PIERCED
LONGITUDINAL MEMBERS

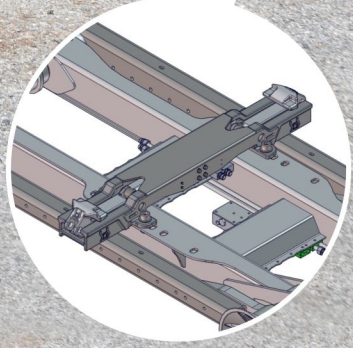

EXTERNAL HYDRAULIC
LOCKING

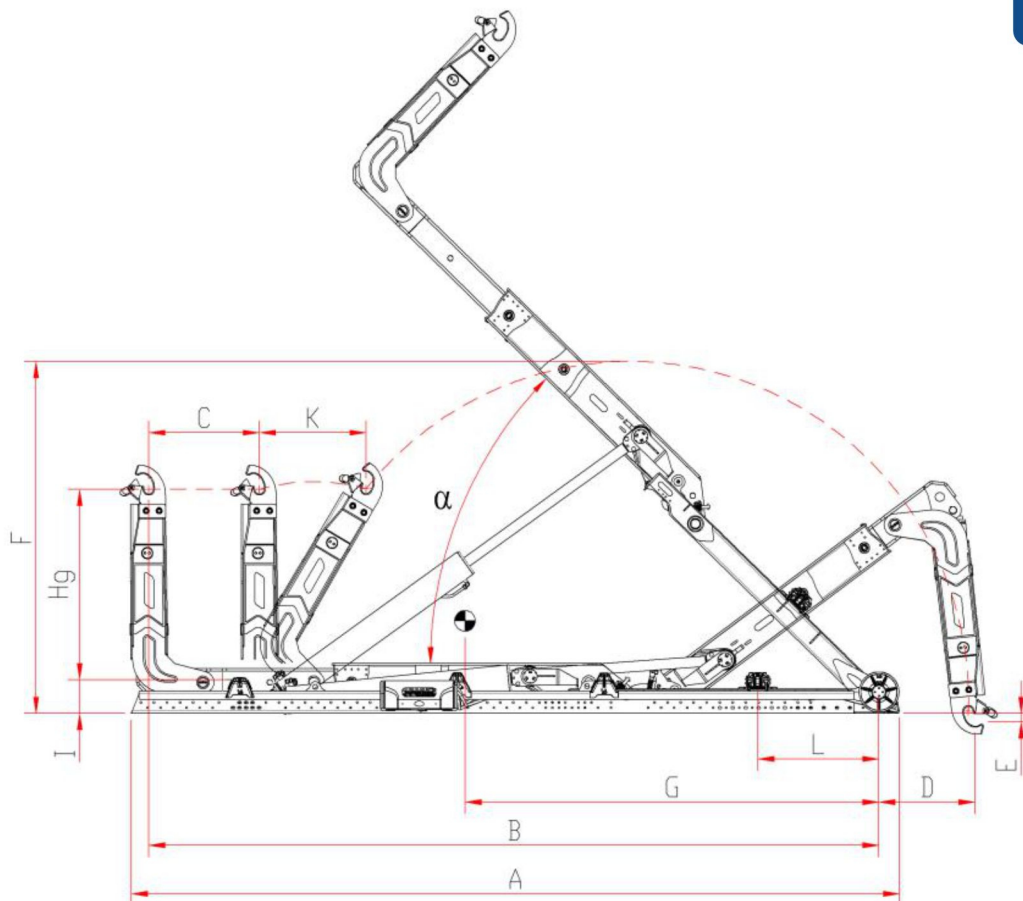

MODEL	TAL 60.000 C MS	TAL 60.000 NC MS	TAL 60.000 N MS	TAL 60.000 NL MS	TAL 60.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	238,58" (6.060 mm)	246,45" (6.260 mm)	254,33" (6.460 mm)	262,2" (6.660 mm)	269,68" (6.850 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)	45,27" (1150 mm)
D	48,81" (1.250 mm)	48,81" (1.050 mm)	40,94" (850 mm)	37" (650 mm)	29,13" (450 mm)
E	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)	3,93" (100 mm)
F	1113,78" (2.890 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)	106,29" (2.700 mm)
G	125,98" (3.200 mm)	131,89" (3.350 mm)	137,79" (3.500 mm)	143,70" (3.650mm)	147,63" (3.750 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	15,74" (500 mm)	15,74" (700 mm)	23,62" (900 mm)	27,55" (1100 mm)	35,43" (1300 mm)
K	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)	33,46" (850 mm)
Weight*	6.591 lb (2.990 Kg)	6.657 lb (3.020 Kg)	6.724 lb (3.050 Kg)	6.768 lb (3.070 Kg)	6.834 lb (3.100 Kg)
α	57°	53°	51°	48°	45°
Container min. max.	15' – 21' (4.570 – 6.400 mm)	15' – 22' (4.570 – 6.700 mm)	16' – 22' (4.880 - 6.700 mm)	16' – 23' (4.880 – 7.000 mm)	17' – 24' (5.180 - 7.310 mm)
LIFTING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height