



HOOK WITH HYDRAULIC
ADJUSTABLE LEVEL




BOBEASY
CAB CONTROL




HOOK WITH MECHANIC
ADJUSTABLE LEVEL



SOFT TOUCH
INTERLOCK




EXTERNAL MECHANICAL
LOCKING




UNDERFRAME PIERCED
LONGITUDINAL MEMBERS



BOLTED INTERCHANGEABLE
CONTAINER SUPPORT



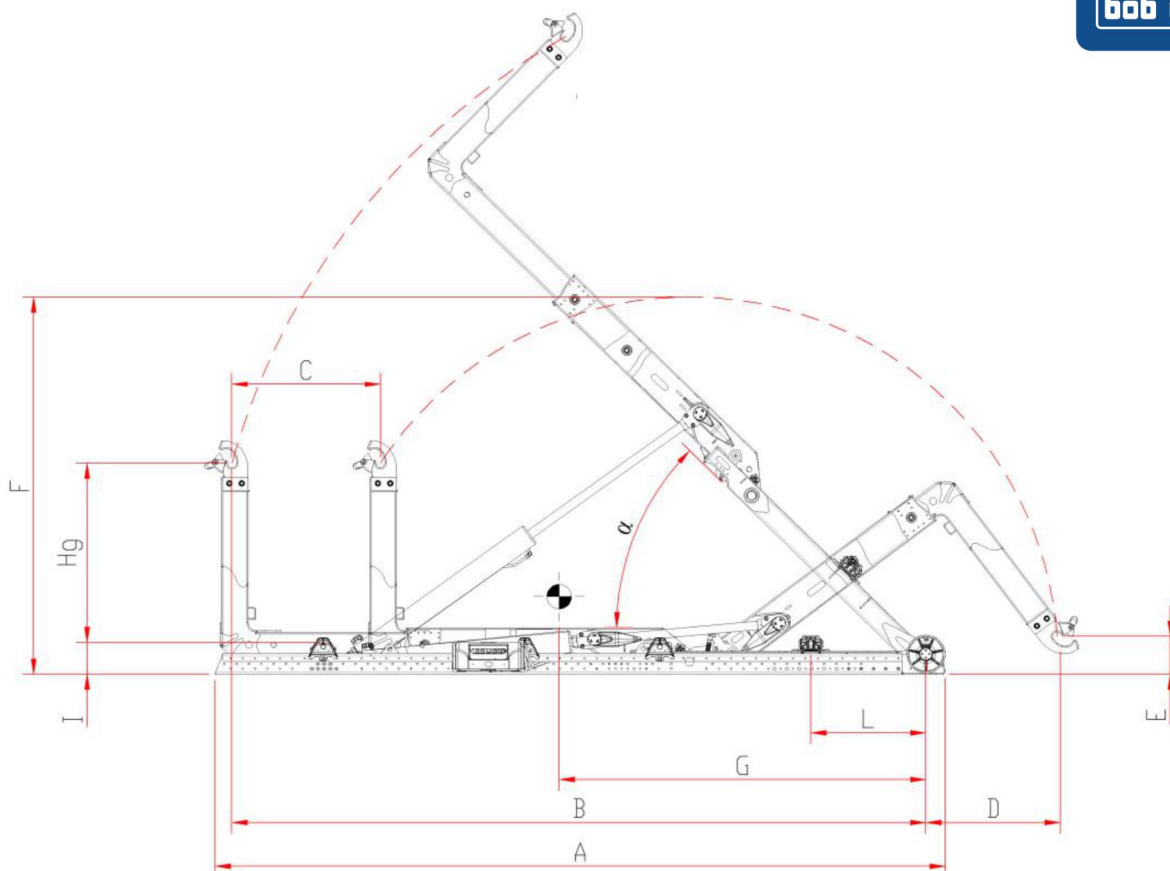

MODEL	TL 60.000 C MS	TL 60.000 NC MS	TL 60.000 N MS	TL 60.000 NL MS	TL 60.000 L MS
Hg	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)	53,88"/61,75" (1.369/1.569mm)
A	246,45" (6.260 mm)	254,33" (6.460 mm)	262,20" (6.660 mm)	269,68" (6.850 mm)	277,55" (7.050 mm)
B	226,37" (5.750 mm)	234,25" (5.950 mm)	242,12" (6.150 mm)	250" (6.350 mm)	257,87" (6.550 mm)
C	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)	51,18" (1300 mm)
D	66,92" (1.480 mm)	66,92" (1.280 mm)	59,05" (1.080 mm)	51,18" (880 mm)	43,3" (680 mm)
E	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)	6,69" (170 mm)
F	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)	129,52" (3.290 mm)
G	124,01" (3.150 mm)	129,92" (3.300 mm)	135,82" (3.450 mm)	141,73" (3.600 mm)	145,66" (3.700 mm)
I	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)	10,23" (260 mm)
L	14,56" (700 mm)	22,44" (900 mm)	21,65" (1100 mm)	27,55" (1300 mm)	35,43" (1500 mm)
Weight*	6.106 lb (2.770 Kg)	6.150 lb (2.790 Kg)	6.217 lb (2.820 Kg)	6.261 lb (2.840 Kg)	6.349 lb (2.880 Kg)
α	54°	51°	48°	46°	44°
Container min. max.	16' – 21' (4.880 – 6.400 mm)	16' – 22' (4.880 – 6.700 mm)	17' – 22' (5.180 – 6.700 mm)	18' – 23' (5.480 – 7.000 mm)	18' – 24' (5.480 – 7.310 mm)
LIFTING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)
TIPPING CAPACITY	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)	60.000 lb (27.215 Kg)

*with hook level 62" only and according to chassis height